Now available upon request: a zinc-coated long span system through hot-dip galvanising in a BAKS' new facility, guaranteeing top quality, low prices, timeliness, and reliability of service.

IMPORTANT NOTICE: BAKS is introducing the multi-purpose side rail (side wall) for long span cable trays and ladders.

Heights: H100, H110, H120, H150, 160 and H200 mm

Widths: 100 ÷ 600 mm

Thickness: 1.5; 2.0; 2.5; 3.0 mm

Spacing of Supports: even to 12 m

High technical properties

Production capability of trays up to 12m long

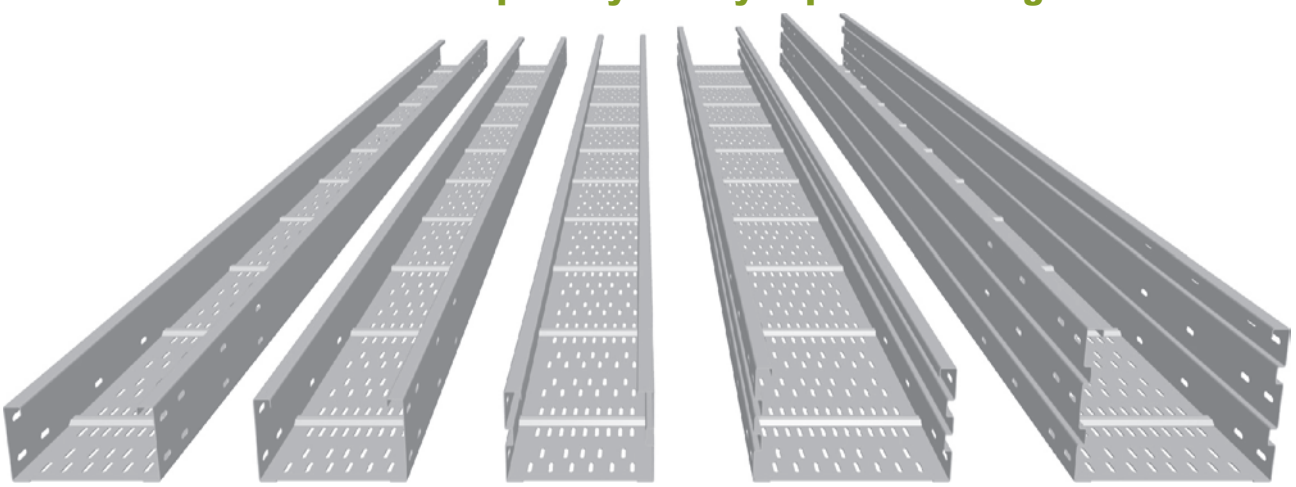

Benefits of the New System:

- attachment of rungs for long span ladders to side rails of long span trays
- joining long span cable trays and ladders directly through applying the same types of connectors in both systems
- enhanced durability due to special - shaped side rails and production capability of the above side rails from sheet 3.0 mm thick

Examples of Long Span System Components

Straight Connector LSSUTH...	Adjustable Vertical Bend LLKS...	Adjustable Vertical Bend Element ELKS...	Corner Connector LKUT	Add-on Connector LKSUC...

We offer our Customers covers for all types of fittings and cable trays:

- **Widths: 100-600**
- **Thickness: 1.5; 2.0 mm**

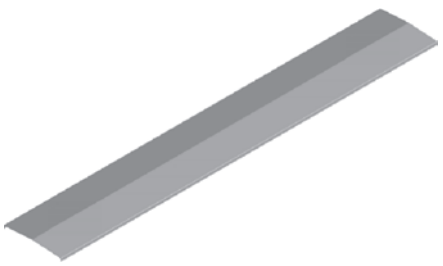

TABULARY OVERVIEW OF COMPONENTS FOR THE ASSEMBLY OF LONG SPAN CABLE TRAY SYSTEMS

TYPES OF CABLE TRAYS	JOINING CABLE TRAYS			
	Straight Connector	Angle Connector	Articulated Connector	Corner Connector + Add-on Connector
KS...H100N Width: 100 - 600 mm Thickness: 1.5; 2.0; 3.0 mm				
KS...H110 Width: 200 - 600 mm Thickness: 1.5; 2.0 mm				
KS...H120 Width: 200 - 600 mm Thickness: 1.5; 2.0 mm	Cable trays can be joined using Straight Connectors: LSUCH... or LSUTH... Cable Trays at spacing above 6m should be used Connector LSUDTH... 	Cable trays can be joined using Angle Connectors: LKSUCH... or LKSUTH... 	Cable trays can be joined using Articulated Connector: LGSUCH... or LGSUTH... 	Cable trays can be joined using Corner Connector LKUT and Add-on Connector LKSUC...
KS...H150  Width: 200 - 600 mm Thickness: 1.5; 2.0; 3.0 mm	For the assembly recommend are Screw Sets SGKM8x16 steel grade 8.8 	For the assembly recommend are Screw Sets SGKM8x16 steel grade 8.8 	For the assembly recommend are Screw Sets SGKM8x16 steel grade 8.8 	For the assembly recommend are Screw Sets SGKM8x16 steel grade 8.8
KS...H160  Width: 200 - 600 mm Thickness: 1.5; 2.0; 3.0 mm				
KS...H200  Width: 200 - 600 mm Thickness: 2.0; 3.0 mm				

Guide:

Full square means this type of assembly is possible =

Empty square means this type of assembly is not possible ≠

JOINING CABLE TRAYS TO FITTINGS

Fittings

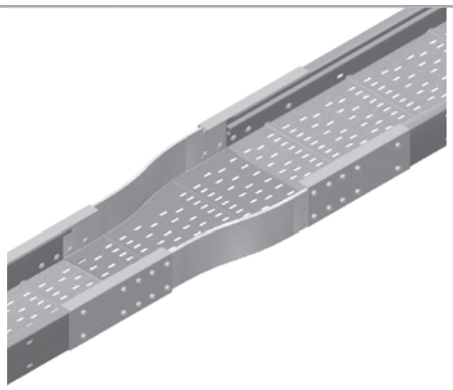

90° Horizontal Bend

KKSC...
KKST...

Horizontal Tee

TKSC...
TKST...



Horizontal Cross-over

CZKSC...
CZKST...



Straight Reducer:

RKSSC...
RKSST...



Vertical Bend - Internal 90°

LWKSC...
LWKSM...

Adjustable Vertical Bend

LLKSC...
LLKST...

For the assembly recommend are Screw Sets SGKM8x16 steel grade 8.8

45° Horizontal Bend

KKSMC...
KKSMT...

Left Reducer

RKLSC...
RKLST...



Vertical Bend - External 90°

LZKSC...
LZKSM...

Right Reducer

RKPSC...
RKPST...



To connect a fitting and a cable tray use fitting connector LSSUCH... or LSSUTH....

For the assembly recommend are Screw Sets SGKM8x16 steel grade 8.8

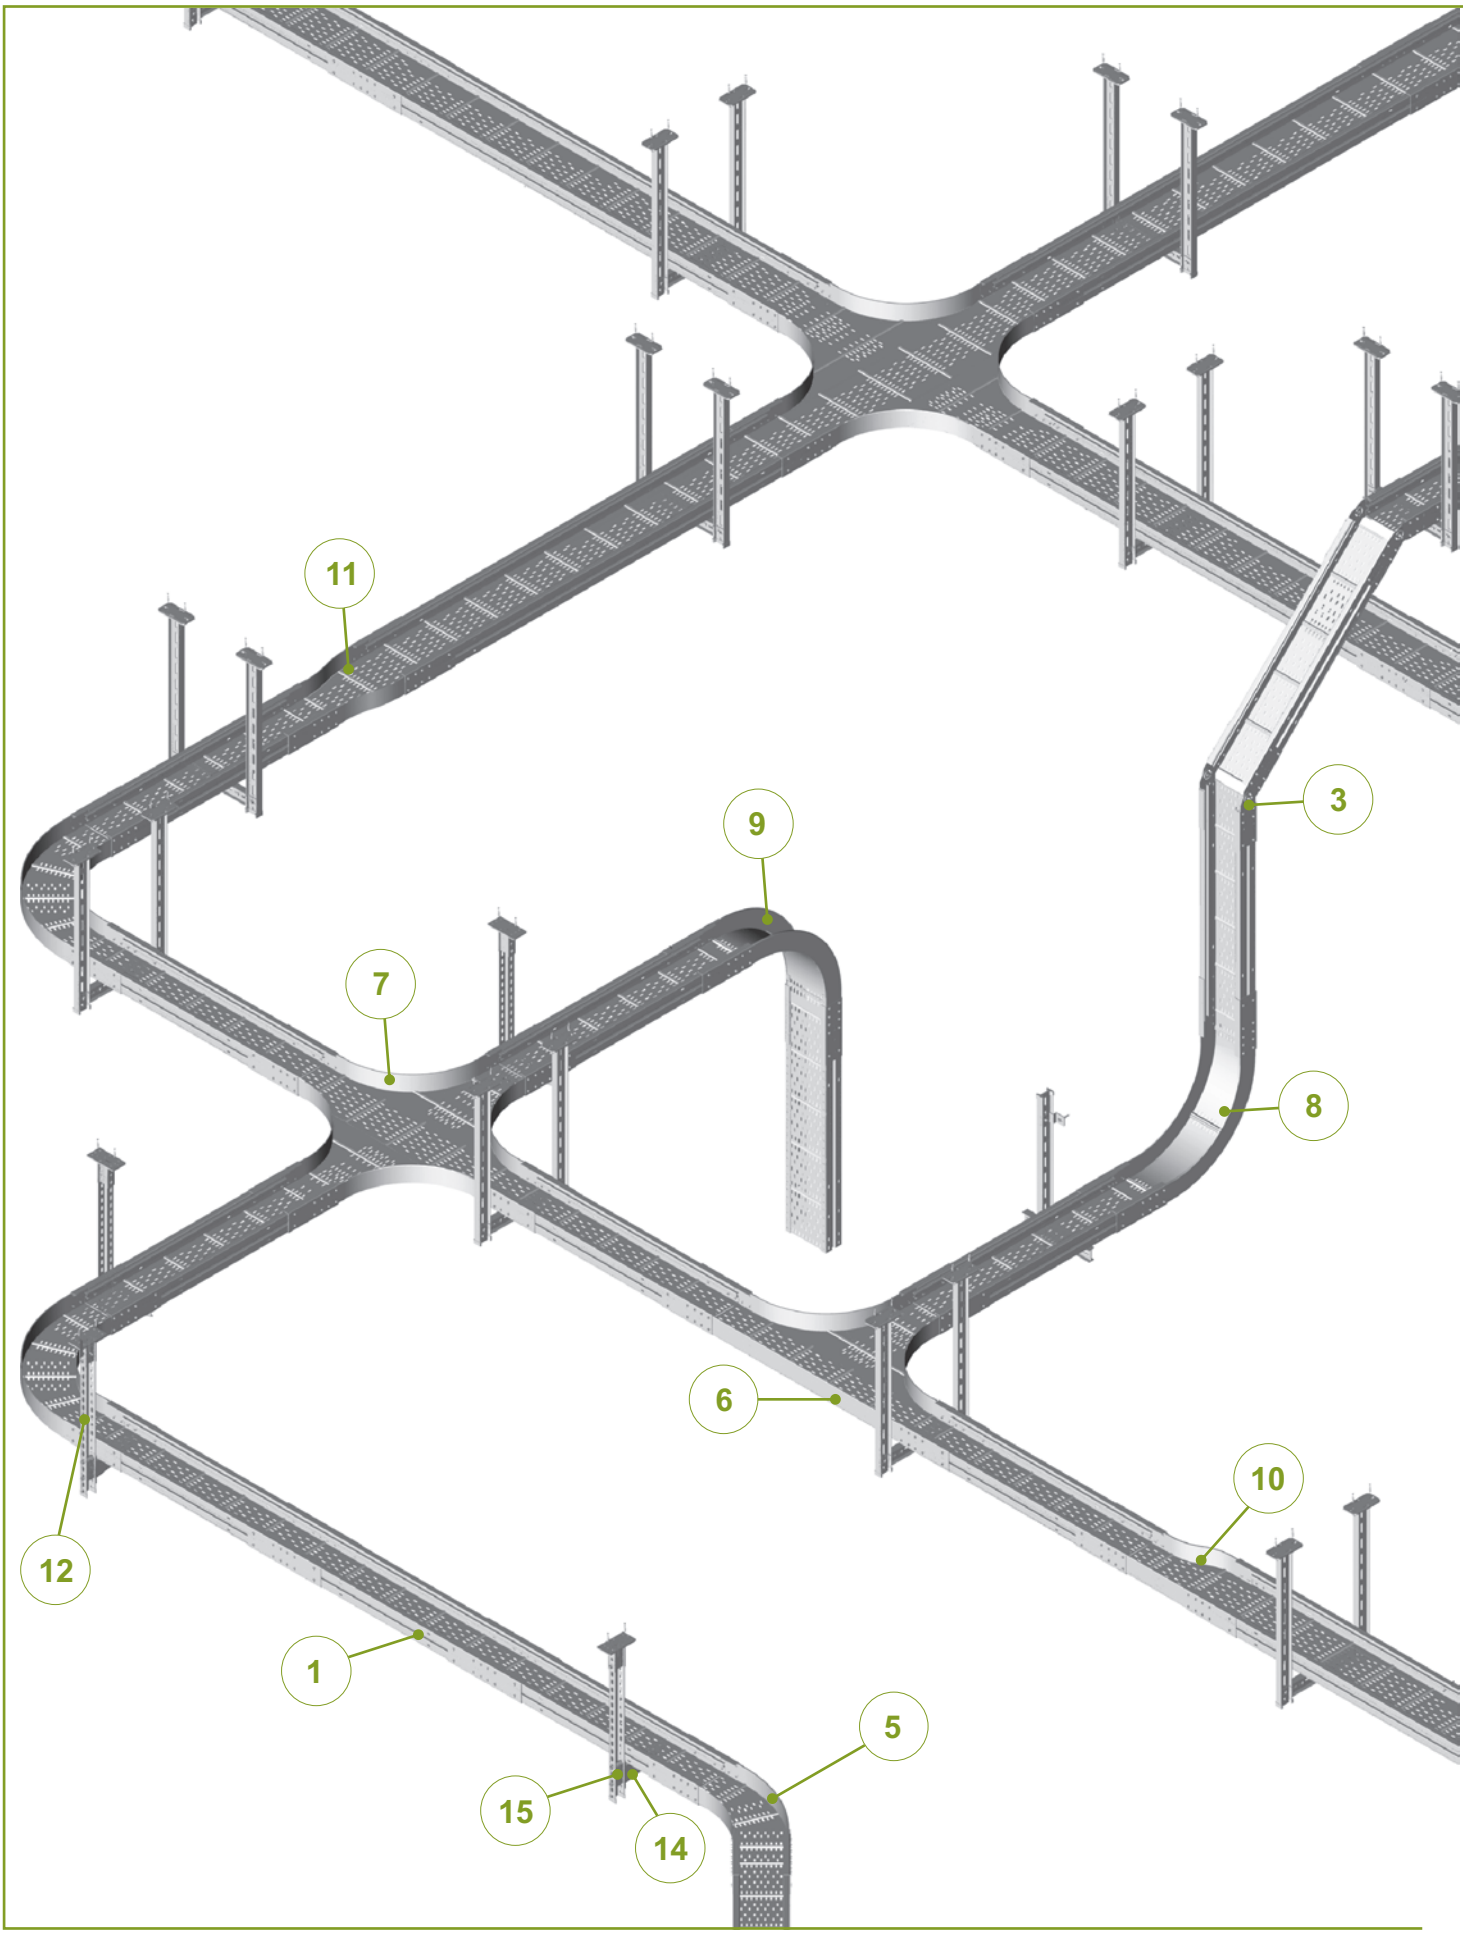
11
3
9
7
8
6
10
12
1
5
15
14

1 Cable Tray KSC...H120 . . . . . III-17
2 Straight Connector LSSUCH120 . . . . . III-17
3 Articulated Connector LGSUCH120 . . . . . III-17
4 90° Horizontal Bend KKSC...H120 . . . . . III-18
5 45° Horizontal Bend KKSMC...H120 . . . . . III-18
6 Horizontal Tee TKSC...H120 . . . . . III-18
7 Horizontal Cross-over CZKSC...H120 . . . . . III-18
8 Vertical Bend - Internal 90° LWKSC...H120 . . . . . III-22
9 Vertical Bend - External 90° LZKSC...H120 . . . . . III-22
10 Left Reducer RKLSC...H120 . . . . . III-21
11 Straight Reducer RKSSC...H120 . . . . . III-21
12 Ceilling Bracket WPCE/WPCEO XII-17
13 Ceilling Bracket WPDH N XIV-2
14 Bracket WWV XI-7
15 Spacer BR70 . . . . . XII-15
16 I-Beam DPH XIV-2
17 Fastening Clamp NDH XIV-6

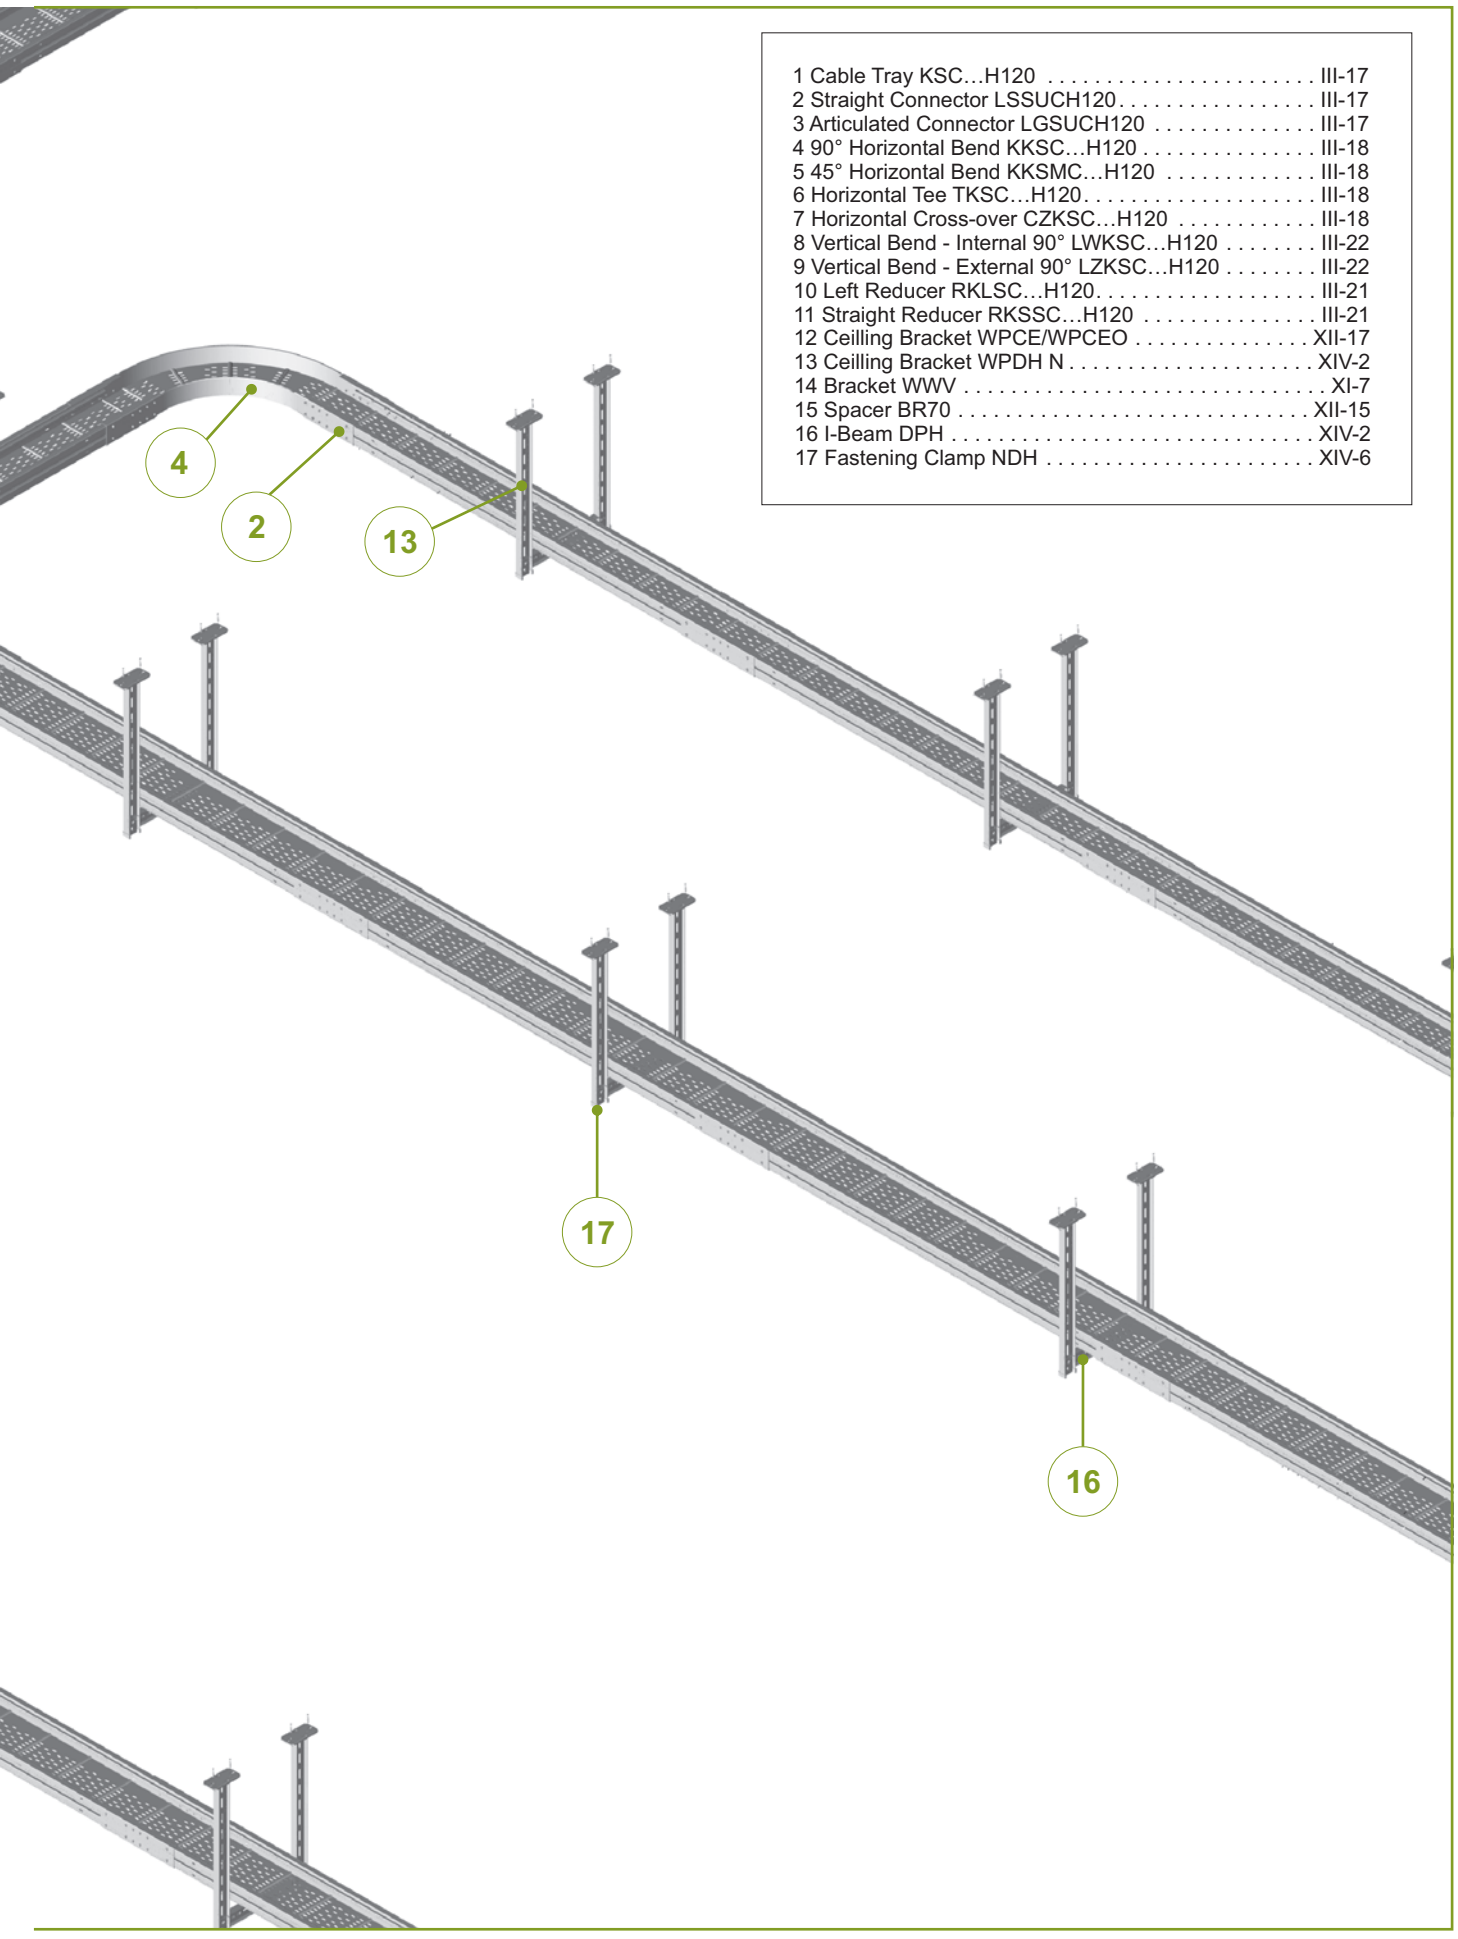

Note. Hot dip galvanizing (PN-EN ISO 1461:2011 (HDG)) and diffusion galvanizing method (PN-EN ISO 17668:2016) for elements up to 200mm will be replaced with zink flake coating method PN-EN ISO 10683:2014-09

Cable Tray

KSC100H100N



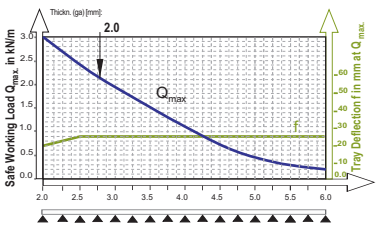

WIDTH	USABLE CROSS-SECTION
100	98 cm²

APPLICATIONS
Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 6 m.

KSC100H100N

± 2.0 mm

CODE	Width a mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
KSC100H100/3N	100	3000	6.34	**221012**	2/6
KSC100H100/6N	100	6000	6.34	**221112**	2/12

IMPORTANT!
In case of large orders:
- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1.2 and 2.5mm thick sheet.

Cable Tray adapted for installation of Cable Clamps: UKZ1/UKZO1 and UKZ2.

Strong

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304), sections to 3m long, with rare perforation in the bottom
L- powder coating in a full range of colours (PC) (info p. 4)

Straight Connector

LDCH100N



APPLICATIONS
Connecting cable routes.

LDCH100N

± 2.0 mm

CODE	kg 1 pc	Catalogue No.	Qty
LDCH100N	0.37	**411001**	30

For the assembly use 8 Screw Sets SGKM8x14 or SGM8x14

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel galvanized using zinc flake coating method PN-EN ISO 10683:2014-09
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Angle Connector

LKDCH100N



APPLICATIONS
Joining cable ladders routed at various angles

LKDCH100N

± 2.0 mm

CODE	kg 1 pc	Catalogue No.	Qty
LKDCH100N	0.65	**411101**	20

For the assembly use 8 Screw Sets SGKM8x14 or SGM8x14
IMPORTANT
New, dense perforation applied in Angle Connector LKDC guarantees bolted connection of two cable ladders crossed in any area of the ladders both at an angle, and straight: no extra drilling necessary!



MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Articulated Connector

LG...



APPLICATIONS
Joining cable ladders routed at various angles. Full range angle adjustment with a lock.

LGCH100N

± 2.0 mm

CODE	kg 1 pc	Catalogue No.	Qty
LGCH100N	0.34	**411301**	10

LGTH100N

± 3.0 mm

CODE	kg 1 pc	Catalogue No.	Qty
LGTH100N	0.51	**411302**	10

For the assembly use 8 Screw Sets SGKM8x14 or SGM8x14

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- stal cynkowana metodą cynku płatkowego PN-EN ISO 10683:2014-09
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Horizontal Bend

KKSC100H100N



KKSC100H100N

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSC100H100N	100	6.40	221212	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LDCH100N and Screw Sets SGKM8x16.

45° Horizontal Bend

KKSMC100H100N



APPLICATIONS
Diversion in cable routing.

KKSMC100H100N

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMC100H100N	100	3.91	221312	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LDCH100N and Screw Sets SGKM8x16.

Horizontal Tee

TKSC100H100N

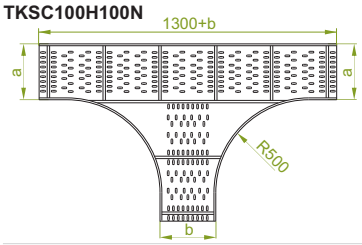

TKSC100H100N

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKSC100H100N	100	10.42	221412	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.



Horizontal Cross-over

CZKSC100H100N

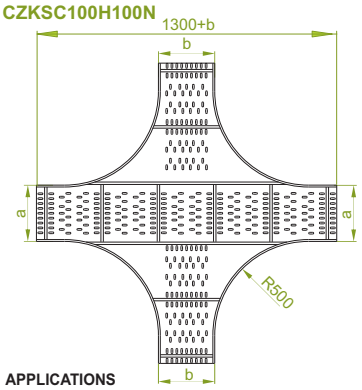

APPLICATIONS
Branching out cable runs.

CZKSC100H100N

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKSC100H100N	100	13.81	221512	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.



Left Reducer

RKLSC200/100H100



RKLSC200/100H100

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKLSC200/100H100	200	100	3.69	221712	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.



Right Reducer

RKPSC200/100H100



RKPSC200/100H100

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKPSC200/100H100	200	100	3.69	221812	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.

Straight Reducer

RKSSC200/100H100



APPLICATIONS
Reducing/extending Width of cable runs.

RKSSC200/100H100

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKSSC200/100H100	200	100	3.69	221612	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.



MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Vertical Bend - Internal

LWKSC100H100



LWKSC100H100

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSC100H100	100	6.02	221912	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.



90° Vertical Bend - External

LZKSC100H100



APPLICATIONS
Diversion in cable routing.

LZKSC100H100

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSC100H100	100	6.02	222012	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.

Adjustable Vertical Bend

LLKSC100H100



LLKSC100H100

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKSC100H100	100	8.19	222112	1

Adjustable Vertical Bend Element

ELKSC100H100



APPLICATIONS
Diversion in cable routing.
Full range angle adjustment with a lock.

ELKSC100H100

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKSC100H100	100	2.74	222212	1

For the installation of segments of adjustable vertical bend element use Screw Sets SMM10x20



MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Cable Tray

KS...

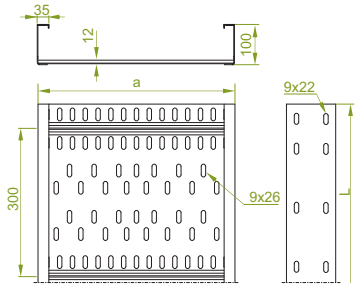

IMPORTANT! Spacing of Supports up to 8 m!

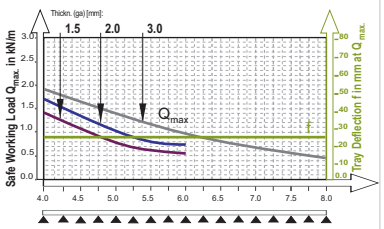

WIDTH	USABLE CROSS-SECTION
200	164 cm²
300	246 cm²
400	328 cm²
500	410 cm²
600	492 cm²

APPLICATIONS
Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 8 m.

KSP...H100N

CODE	Width a mm	Lenght L mm	kg 1 m ± 1.5 mm	Catalogue No.	Qty/m	
KSP200H100/3N	200	3000	5.81	220020	2/6	*
KSP200H100/6N	200	6000	5.81	220021	2/12	
KSP300H100/3N	300	3000	6.71	220030	2/6	*
KSP300H100/6N	300	6000	6.71	220031	2/12	
KSP400H100/3N	400	3000	7.61	220040	2/6	*
KSP400H100/6N	400	6000	7.61	220041	2/12	
KSP500H100/3N	500	3000	8.51	220050	2/6	*
KSP500H100/6N	500	6000	8.51	220051	2/12	
KSP600H100/3N	600	3000	9.41	220060	2/6	*
KSP600H100/6N	600	6000	9.41	220061	2/12	

KSC...H100N

CODE	Width a mm	Lenght L mm	kg 1 m ± 2.0 mm	Catalogue No.	Qty/m	
KSC200H100/3N	200	3000	7.24	220120	2/6	*
KSC200H100/6N	200	6000	7.24	220121	2/12	
KSC300H100/3N	300	3000	8.14	220130	2/6	*
KSC300H100/6N	300	6000	8.14	220131	2/12	
KSC400H100/3N	400	3000	9.04	220140	2/6	*
KSC400H100/6N	400	6000	9.04	220141	2/12	
KSC500H100/3N	500	3000	9.94	220150	2/6	*
KSC500H100/6N	500	6000	9.94	220151	2/12	
KSC600H100/3N	600	3000	10.84	220160	2/6	*
KSC600H100/6N	600	6000	10.84	220161	2/12	

KST...H100N

CODE	Width a mm	Lenght L mm	kg 1 m ± 3.0 mm	Catalogue No.	Qty/m	
KST200H100/6N	200	6000	9.67	220221	2/12	
KST300H100/6N	300	6000	10.57	220231	2/12	
KST400H100/6N	400	6000	11.47	220241	2/12	
KST500H100/6N	500	6000	12.37	220251	2/12	
KST600H100/6N	600	6000	13.27	220261	2/12	

*** - available on request in qty over 200 m**

In case of large orders:
- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1.2 and 2.5mm thick sheet.

Cable Tray adapted for installation of Cable Clamps: UKZ1/UKZO1 and UKZ2.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv.
to PN-EN ISO 1461:2011 (HDG) **on request:**
- KSP... - over 200 m
- KSC.../3 (3 m lenght) - over 200 m
- KST... - over 200 m
E- stainless steel (SS), grade 1.4301 (AISI304), sections to 3m long, with rare perforation in the bottom
L- powder coating in a full range of colours (PC) (info p. 4)

Straight Connector

LSU...



APPLICATIONS
Joining long span cable tray

LSUCH100

CODE	Height H mm	Lenght L mm	kg 1 pc ± 2.0 mm	Catalogue No.	qty
LSUCH100	105	300	1.15	220302	10

LSUTH100

CODE	Height H mm	Lenght L mm	kg 1 pc ± 3.0 mm	Catalogue No.	qty
LSUTH100	107	300	1.72	220303	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16

LSUDTH100

CODE	Height H mm	Lenght L mm	kg 1 pc ± 3.0 mm	Catalogue No.	qty
LSUDTH100	107	800	2.50	220702	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. Long Straight Connector LSUDT should be used in case of suppor spacing above 6m
For the assembly use 12 Screw Sets SGKM8x16

Straight Connector

LSSU...



APPLICATIONS
Joining fittings for long span systems to cable tray.

LSSUCH100

CODE	Height H mm	kg 1 pc ± 2.0 mm	Catalogue No.	qty
LSSUCH100	105	0.78	220402	10

LSSUTH100

CODE	Height H mm	kg 1 pc ± 3.0 mm	Catalogue No.	qty
LSSUTH100	107	1.17	220403	10

Universal Straight Connector for Fittings that suits Long Span Cable Trays and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16

Angle Connector

LKSU...



APPLICATIONS
Joining long span cable tray routed at various angles.

LKSUCH100

CODE	Height H mm	kg 1 pc ± 2.0 mm	Catalogue No.	qty
LKSUCH100	105	1.67	220502	10

LKSUTH100

CODE	Height H mm	kg 1 pc ± 3.0 mm	Catalogue No.	qty
LKSUTH100	107	2.50	220503	10

Universal Angle Connectors - Bendable for Long Span Cable Tray and Ladder Systems. For the assembly use 16 Screw Sets SGKM8x16

Articulated Connector

LGSU...



APPLICATIONS
Joining cable tray routed at various angles. Full range angle adjustment with a lock.

LGSUCH100

CODE	Height H mm	kg 1 pc ± 2.0 mm	Catalogue No.	qty
LGSUCH100	105	1.15	220602	10

LGSUTH100

CODE	Height H mm	kg 1 pc ± 3.0 mm	Catalogue No.	qty
LGSUTH100	107	1.72	220603	10

Universal Articulated Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 12 Screw Sets SGKM8x16
Full range angle adjustment!

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv.
to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Horizontal Bend

KKS...



KKSC...H100N

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSC200H100N	200	8.43	220722	1
KKSC300H100N	300	10.46	220732	1
KKSC400H100N	400	12.58	220742	1
KKSC500H100N	500	14.93	220752	1
KKSC600H100N	600	17.00	220762	1

KKST...H100N

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKST200H100N	200	11.58	220723	1
KKST300H100N	300	14.10	220733	1
KKST400H100N	400	16.80	220743	1
KKST500H100N	500	19.68	220753	1
KKST600H100N	600	22.44	220763	1

45° Horizontal Bend

KKSM...



KKSMC...H100N

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMC200H100N	200	5.16	220822	1
KKSMC300H100N	300	6.41	220832	1
KKSMC400H100N	400	7.72	220842	1
KKSMC500H100N	500	9.17	220852	1
KKSMC600H100N	600	10.44	220862	1

KKSMT...H100N

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMT200H100N	200	7.18	220823	1
KKSMT300H100N	300	8.74	220833	1
KKSMT400H100N	400	10.42	220843	1
KKSMT500H100N	500	12.02	220853	1
KKSMT600H100N	600	13.92	220863	1

APPLICATIONS
Diversion in cable routing.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

Horizontal Tee

TKS...

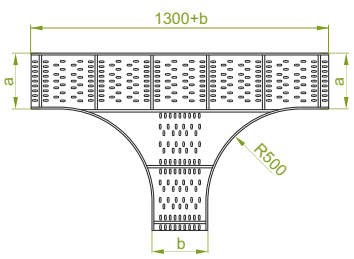

TKSC...H100N

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKSC200H100N	200	12.96	220922	1
TKSC300H100N	300	15.50	220932	1
TKSC400H100N	400	18.33	220942	1
TKSC500H100N	500	21.07	220952	1
TKSC600H100N	600	23.98	220962	1

TKST...H100N

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKST200H100N	200	21.08	220923	1
TKST300H100N	300	25.03	220933	1
TKST400H100N	400	28.98	220943	1
TKST500H100N	500	33.16	220953	1
TKST600H100N	600	36.88	220963	1



Horizontal Cross-over

CZKS...

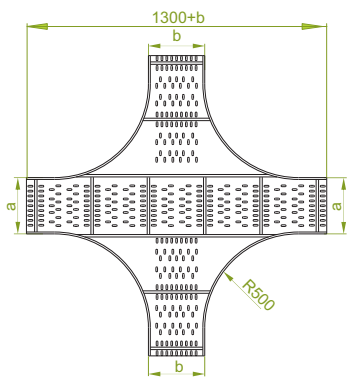

CZKSC...H100N

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKSC200H100N	200	16.85	221022	1
CZKSC300H100N	300	19.89	221032	1
CZKSC400H100N	400	23.05	221042	1
CZKSC500H100N	500	26.31	221052	1
CZKSC600H100N	600	29.26	221062	1

CZKST...H100N

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKST200H100N	200	22.32	221023	1
CZKST300H100N	300	25.98	221033	1
CZKST400H100N	400	29.76	221043	1
CZKST500H100N	500	33.78	221053	1
CZKST600H100N	600	37.32	221063	1



In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

APPLICATIONS
Branching out cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Left Reducer

RKLS...



RKLSC...H100N

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKLSC300/200H100N	300	200	4.29	221332	1
RKLSC400/300H100N	400	300	4.89	221342	1
RKLSC500/400H100N	500	400	5.49	221352	1
RKLSC600/500H100N	600	500	6.09	221362	1

RKLST...H100N

± 3.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKLST300/200H100N	300	200	5.94	221333	1
RKLST400/300H100N	400	300	6.66	221343	1
RKLST500/400H100N	500	400	7.38	221353	1
RKLST600/500H100N	600	500	8.10	221363	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Right Reducer

RKPS...



RKPSC...H100N

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKPSC300/200H100N	300	200	4.29	221432	1
RKPSC400/300H100N	400	300	4.89	221442	1
RKPSC500/400H100N	500	400	5.49	221452	1
RKPSC600/500H100N	600	500	6.09	221462	1

RKPST...H100N

± 3.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKPST300/200H100N	300	200	5.94	221433	1
RKPST400/300H100N	400	300	6.66	221443	1
RKPST500/400H100N	500	400	7.38	221453	1
RKPST600/500H100N	600	500	8.10	221463	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Straight Reducer

RKSS...



RKSSC...H100N

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKSSC300/200H100N	300	200	4.29	221532	1
RKSSC400/300H100N	400	300	4.89	221542	1
RKSSC500/400H100N	500	400	5.49	221552	1
RKSSC600/500H100N	600	500	6.09	221562	1

RKSST...H100N

± 3.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKSST300/200H100N	300	200	5.94	221533	1
RKSST400/300H100N	400	300	6.66	221543	1
RKSST500/400H100N	500	400	7.38	221553	1
RKSST600/500H100N	600	500	8.10	221563	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Reducing/extending Width of cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Application example of RKSSC...H100.

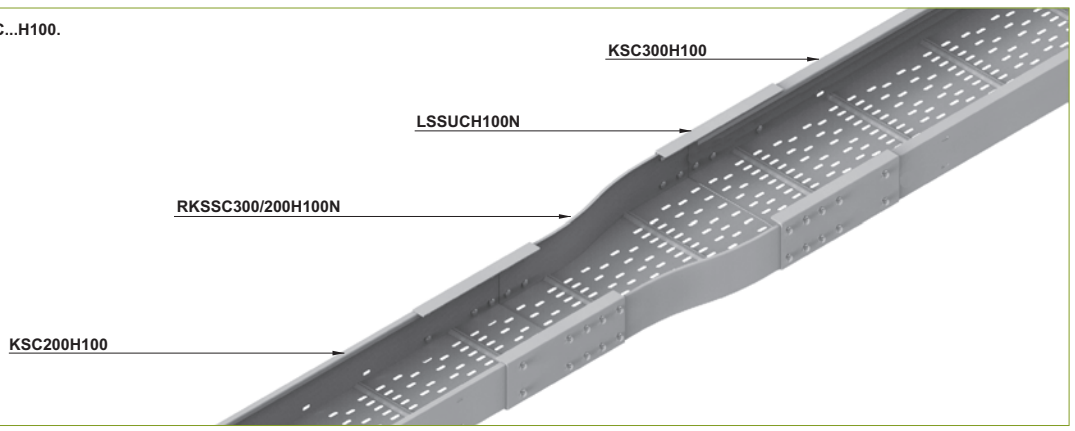

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Vertical Bend - Internal

LWKS...



LWKSC...H100N

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
LWKSC200H100N	200	7.03	221122	1
LWKSC300H100N	300	8.04	221132	1
LWKSC400H100N	400	9.02	221142	1
LWKSC500H100N	500	10.13	221152	1
LWKSC600H100N	600	11.27	221162	1

LWKSM...H100N

± 2.5 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
LWKSM200H100N	200	9.84	221123	1
LWKSM300H100N	300	11.04	221133	1
LWKSM400H100N	400	12.24	221143	1
LWKSM500H100N	500	13.50	221153	1
LWKSM600H100N	600	14.86	221163	1



90° Vertical Bend - External

LZKS...



APPLICATIONS
Diversion in cable routing.

LZKSC...H100N

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
LZKSC200H100N	200	7.03	221222	1
LZKSC300H100N	300	8.04	221232	1
LZKSC400H100N	400	9.02	221242	1
LZKSC500H100N	500	10.13	221252	1
LZKSC600H100N	600	11.27	221262	1

LZKSM...H100N

± 2.5 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
LZKSM200H100N	200	9.84	221223	1
LZKSM300H100N	300	11.04	221233	1
LZKSM400H100N	400	12.24	221243	1
LZKSM500H100N	500	13.50	221253	1
LZKSM600H100N	600	14.86	221263	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.

Adjustable Vertical Bend

LLKS...



LLKSC...H100

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
LLKSC200H100	200	8.68	221622	1
LLKSC300H100	300	9.17	221632	1
LLKSC400H100	400	9.64	221642	1
LLKSC500H100	500	10.12	221652	1
LLKSC600H100	600	10.59	221662	1

LLKST...H100

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
LLKST200H100	200	12.77	221623	1
LLKST300H100	300	13.37	221633	1
LLKST400H100	400	13.97	221643	1
LLKST500H100	500	14.57	221653	1
LLKST600H100	600	15.17	221663	1

Adjustable Vertical Bend Element

ELKS...



APPLICATIONS
Diversion in cable routing.
Full range angle adjustment with a lock.

ELKSC...H100

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
ELKSC200H100	200	2.98	221722	1
ELKSC300H100	300	3.22	221732	1
ELKSC400H100	400	3.46	221742	1
ELKSC500H100	500	3.70	221752	1
ELKSC600H100	600	3.92	221762	1

ELKST...H100

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
ELKST200H100	200	4.34	221723	1
ELKST300H100	300	4.64	221733	1
ELKST400H100	400	4.94	221743	1
ELKST500H100	500	5.24	221753	1
ELKST600H100	600	5.52	221763	1

For the installation of segments of adjustable vertical bend element use Screw Sets SMM10x20

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Cable Tray

KS...

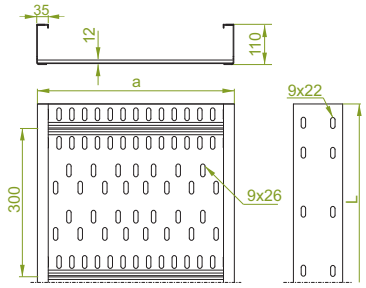

IMPORTANT! Spacing of Supports up to 8 m!

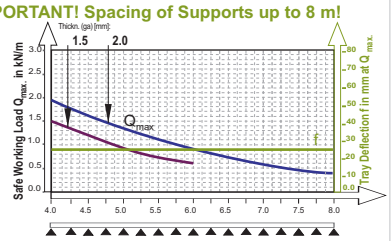

WIDTH	USABLE CROSS-SECTION
200	174 cm²
300	266 cm²
400	358 cm²
500	450 cm²
600	542 cm²

APPLICATIONS
Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 8 m.

KSP...H110

± 1.5 mm

CODE	Width a mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m	
KSP200H110/3	200	3000	6.05	230021	2/6	*
KSP200H110/6	200	6000	6.05	230020	2/12	
KSP300H110/3	300	3000	6.95	230031	2/6	*
KSP300H110/6	300	6000	6.95	230030	2/12	
KSP400H110/3	400	3000	7.85	230041	2/6	*
KSP400H110/6	400	6000	7.85	230040	2/12	
KSP500H110/3	500	3000	8.75	230051	2/6	*
KSP500H110/6	500	6000	8.75	230050	2/12	
KSP600H110/3	600	3000	9.65	230061	2/6	*
KSP600H110/6	600	6000	9.65	230060	2/12	

KSC...H110

± 2.0 mm

CODE	Width a mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m	
KSC200H110/3	200	3000	7.56	230121	2/6	*
KSC200H110/6	200	6000	7.56	230120	2/12	
KSC300H110/3	300	3000	8.56	230131	2/6	*
KSC300H110/6	300	6000	8.56	230130	2/12	
KSC400H110/3	400	3000	9.36	230141	2/6	*
KSC400H110/6	400	6000	9.36	230140	2/12	
KSC500H110/3	500	3000	10.26	230151	2/6	*
KSC500H110/6	500	6000	10.26	230150	2/12	
KSC600H110/3	600	3000	11.16	230161	2/6	*
KSC600H110/6	600	6000	11.16	230160	2/12	

* - available on request in qty over 200 m

In case of large orders:
- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1.2 and 2.5mm thick sheet.

Cable Tray adapted for installation of Cable Clamps: UKZ1/UKZO1 and UKZ2.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) **on request:**
- KSP... - over 200 m
- KSC... - over 200 m
E- stainless steel (SS), grade 1.4301 (AISI304), sections to 3m long, with rare perforation in the bottom
L- powder coating in a full range of colours (PC) (info p. 4)

Straight Connector

LSU...



APPLICATIONS
Joining long span cable tray

LSUCH110

± 2.0 mm

CODE	Height H mm	Lenght L mm	kg 1 pc	Catalogue No.	Qty	
LSUCH110	115	300	1.22	230302	10	

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems.
For the assembly use 8 Screw Sets SGKM8x16

LSUDTH110

± 3.0 mm

CODE	Height H mm	Lenght L mm	kg 1 pc	Catalogue No.	Qty	
LSUDTH110	117	800	2.66	230702	10	

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. Long Straight Connector should be used in case of support spacing above 6 m.
For the assembly use 12 Screw Sets SGKM8x16

Straight Connector

LSSU...



APPLICATIONS
Joining fittings for long span systems to cable tray.

LSSUCH110

± 2.0 mm

CODE	kg 1 pc	Catalogue No.	Qty	
LSSUCH110	0.83	230402	10	

Universal Straight Connector for Fittings that suits Long Span Cable Trays and Ladder Systems
For the assembly use 8 Screw Sets SGKM8x16

Angle Connector

LKSU...



APPLICATIONS
Joining long span cable tray routed at various angles.

LKSUCH110

± 2.0 mm

CODE	kg 1 pc	Catalogue No.	Qty	
LKSUCH110	1.77	230502	10	

Universal Angle Connectors - Bendable for Long Span Cable Tray and Ladder Systems.
For the assembly use 16 Screw Sets SGKM8x16



Articulated Connector

LGSU...



APPLICATIONS
Joining cable tray routed at various angles. Full range angle adjustment with a lock.

LGSUCH110

± 2.0 mm

CODE	kg 1 pc	Catalogue No.	Qty	
LGSUCH110	1.22	230602	10	

Universal Articulated Connector for Long Span Cable Tray and Ladder Systems.
For the assembly use 12 Screw Sets SGKM8x16
Full range angle adjustment!

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Horizontal Bend

KKS...



KKSC...H110

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
KKSC200H110	200	8.79	230722	1
KKSC300H110	300	10.89	230732	1
KKSC400H110	400	13.04	230742	1
KKSC500H110	500	15.43	230752	1
KKSC600H110	600	17.58	230762	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

45° Horizontal Bend

KKSM...



KKSMC...H110

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
KKSMC200H110	200	6.26	230822	1
KKSMC300H110	300	7.63	230832	1
KKSMC400H110	400	9.00	230842	1
KKSMC500H110	500	10.54	230852	1
KKSMC600H110	600	12.25	230862	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

APPLICATIONS
Diversion in cable routing.

Horizontal Tee

TKS...

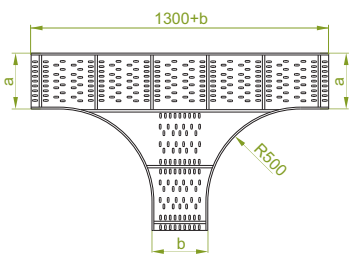

TKSC...H110

± 2.0 mm

CODE	Width a=b mm	kg 1 pc	Catalogue No.	Qty
TKSC200H110	200	13.56	230922	1
TKSC300H110	300	16.14	230932	1
TKSC400H110	400	19.01	230942	1
TKSC500H110	500	21.77	230952	1
TKSC600H110	600	24.74	230962	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.



Horizontal Cross-over

CZKS...

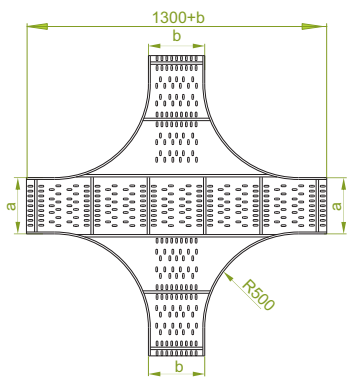

CZKSC...H110

± 2.0 mm

CODE	Width a=b mm	kg 1 pc	Catalogue No.	Qty
CZKSC200H110	200	17.49	231022	1
CZKSC300H110	300	20.61	231032	1
CZKSC400H110	400	23.77	231042	1
CZKSC500H110	500	27.03	231052	1
CZKSC600H110	600	31.74	231062	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Branching out cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Left Reducer

RKLS...



RKLSC...H110

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKLSC300/200H110	300	200	4.49	**231332**	1
RKLSC400/300H110	400	300	5.09	**231342**	1
RKLSC500/400H110	500	400	5.69	**231352**	1
RKLSC600/500H110	600	500	6.29	**231362**	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Right Reducer

RKPS...



RKPSC...H110

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKPSC300/200H110	300	200	4.49	**231432**	1
RKPSC400/300H110	400	300	5.09	**231442**	1
RKPSC500/400H110	500	400	5.69	**231452**	1
RKPSC600/500H110	600	500	6.29	**231462**	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Straight Reducer

RKSS...



RKSSC...H110

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKSSC300/200H110	300	200	4.49	**231532**	1
RKSSC400/300H110	400	300	5.09	**231542**	1
RKSSC500/400H110	500	400	5.69	**231552**	1
RKSSC600/500H110	600	500	6.29	**231562**	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Reducing/extending Width of cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Application example of RKSSC...H110.

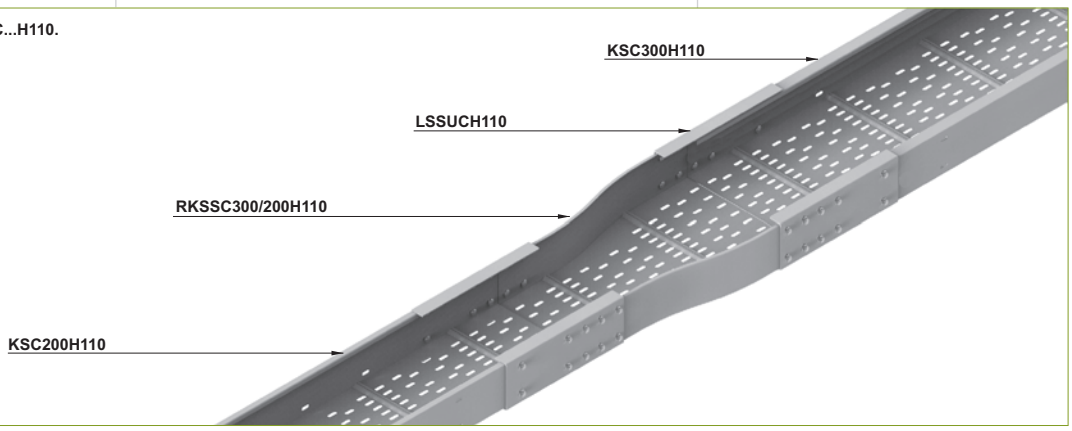

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Vertical Bend - Internal

LWKS...



LWKSC...H110

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSC200H110	200	7.35	231122	1
LWKSC300H110	300	8.36	231132	1
LWKSC400H110	400	9.18	231142	1
LWKSC500H110	500	10.45	231152	1
LWKSC600H110	600	11.59	231162	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.



90° Vertical Bend - External

LZKS...



LZKSC...H110

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSC200H110	200	7.35	231222	1
LZKSC300H110	300	8.36	231232	1
LZKSC400H110	400	9.18	231242	1
LZKSC500H110	500	10.45	231252	1
LZKSC600H110	600	11.59	231262	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.

APPLICATIONS
Diversion in cable routing.

Adjustable Vertical Bend

LLKS...



LLKSC...H110

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKSC200H110	200	9.25	231622	1
LLKSC300H110	300	9.74	231632	1
LLKSC400H110	400	10.21	231642	1
LLKSC500H110	500	10.69	231652	1
LLKSC600H110	600	11.16	231662	1

Adjustable Vertical Bend Element

ELKS...



ELKSC...H110

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKSC200H110	200	3.15	231722	1
ELKSC300H110	300	3.36	231732	1
ELKSC400H110	400	3.58	231742	1
ELKSC500H110	500	3.82	231752	1
ELKSC600H110	600	4.04	231762	1

For the installation of segments of adjustable vertical bend element use Screw Sets SMM10x20

APPLICATIONS
Diversion in cable routing.
Full range angle adjustment with a lock.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Cable Tray

KS...

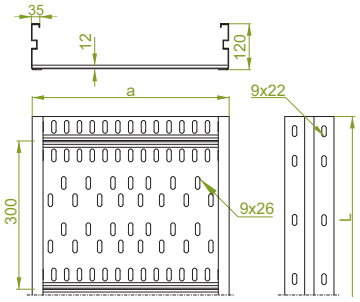

IMPORTANT! Spacing of Supports up to 8 m!

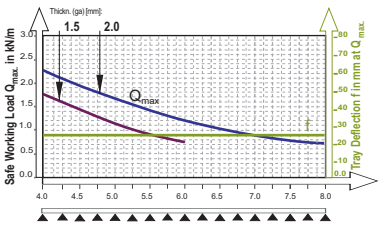

WIDTH	USABLE CROSS-SECTION
200	226 cm²
300	346 cm²
400	466 cm²
500	586 cm²
600	706 cm²

APPLICATIONS
Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 8 m.

KSP...H120

CODE	Width a mm	Lenght L mm	kg 1 m	± 1.5 mm Catalogue No.	Qty/m	
KSP200H120/3	200	3000	7.04	240020	2/6	*
KSP200H120/6	200	6000	7.04	240021	2/12	
KSP300H120/3	300	3000	8.00	240030	2/6	*
KSP300H120/6	300	6000	8.00	240031	2/12	
KSP400H120/3	400	3000	8.96	240040	2/6	*
KSP400H120/6	400	6000	8.96	240041	2/12	
KSP500H120/3	500	3000	9.92	240050	2/6	*
KSP500H120/6	500	6000	9.92	240051	2/12	
KSP600H120/3	600	3000	10.88	240060	2/6	*
KSP600H120/6	600	6000	10.88	240061	2/12	

KSC...H120

CODE	Width a mm	Lenght L mm	kg 1 m	± 2.0 mm Catalogue No.	Qty/m	
KSC200H120/3	200	3000	8.46	240120	2/6	*
KSC200H120/6	200	6000	8.46	240121	2/12	
KSC300H120/3	300	3000	9.36	240130	2/6	*
KSC300H120/6	300	6000	9.36	240131	2/12	
KSC400H120/3	400	3000	10.26	240140	2/6	*
KSC400H120/6	400	6000	10.26	240141	2/12	
KSC500H120/3	500	3000	11.16	240150	2/6	*
KSC500H120/6	500	6000	11.16	240151	2/12	
KSC600H120/3	600	3000	12.06	240160	2/6	*
KSC600H120/6	600	6000	12.06	240161	2/12	

* - available on request in qty over 200 m

In case of large orders:
- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1.2 and 2.5mm thick sheet.

Cable Tray adapted for installation of Cable Clamps: UKZ1/UKZO1 and UKZ2.

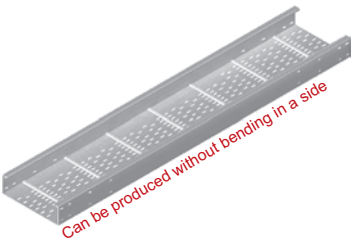

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) **on request:**
- KSP... - over 200 m
- KSC.../3 (3 m lenght) - over 200 m
E- stainless steel (SS), grade 1.4301 (AISI304), sections to 3m long, with rare perforation in the bottom
L- powder coating in a full range of colours (PC) (info p. 4)

Straight Connector

LSU...



APPLICATIONS
Joining long span cable tray

LSUCH120

CODE	Height H mm	Lenght L mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LSUCH120	125	500	1.81	240302	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16

LSUDTH120

CODE	Height a mm	Lenght L mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LSUDTH120	127	800	3.08	240702	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems
Long Straight Connector should be used in case of support spacing above 6 m.
For the assembly use 12 Screw Sets SGKM8x16

Straight Connector

LSSU...



APPLICATIONS
Joining fittings for long span systems to cable tray.

LSSUCH120

CODE	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LSSUCH120	0.97	240402	10

Universal Straight Connector for Fittings that suits Long Span Cable Trays and Ladder Systems
For the assembly use 8 Screw Sets SGKM8x16

Angle Connector

LKSU...

APPLICATIONS
Joining long span cable tray routed at various angles.

LKSUCH120

CODE	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LKSUCH120	2.41	240502	10

Universal Angle Connectors - Bendable for Long Span Cable Tray and Ladder Systems.
For the assembly use 16 Screw Sets SGKM8x16



Articulated Connector

LGSU...



APPLICATIONS
Joining cable tray routed at various angles.
Full range angle adjustment with a lock.

LGSUCH120

CODE	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LGSUCH120	1.82	240602	10

Universal Articulated Connector for Long Span Cable Tray and Ladder Systems.
For the assembly use 12 Screw Sets SGKM8x16
Full range angle adjustment!

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Horizontal Bend

KKS...



KKSC...H120

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
KKSC200H120	200	10.32	240722	1
KKSC300H120	300	12.37	240732	1
KKSC400H120	400	14.91	240742	1
KKSC500H120	500	17.68	240752	1
KKSC600H120	600	20.12	240762	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

45° Horizontal Bend

KKSM...



KKSMC...H120

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
KKSMC200H120	200	6.57	240822	1
KKSMC300H120	300	7.94	240832	1
KKSMC400H120	400	9.42	240842	1
KKSMC500H120	500	10.90	240852	1
KKSMC600H120	600	12.60	240862	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

APPLICATIONS
Diversion in cable routing.

Horizontal Tee

TKS...

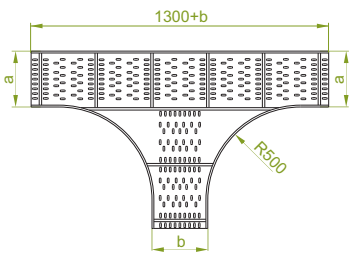

TKSC...H120

± 2.0 mm

CODE	Width a=b mm	kg 1 pc	Catalogue No.	Qty
TKSC200H120	200	15.48	240922	1
TKSC300H120	300	18.52	240932	1
TKSC400H120	400	21.95	240942	1
TKSC500H120	500	25.18	240952	1
TKSC600H120	600	28.76	240962	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

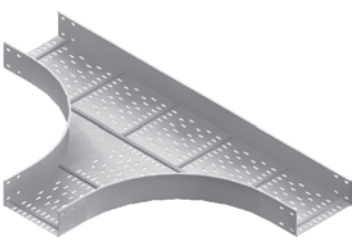

Horizontal Cross-over

CZKS...

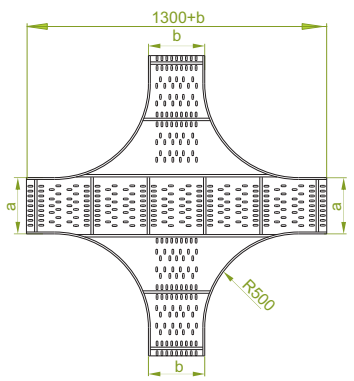

CZKSC...H120

± 2.0 mm

CODE	Width a=b mm	kg 1 pc	Catalogue No.	Qty
CZKSC200H120	200	20.11	241022	1
CZKSC300H120	300	23.83	241032	1
CZKSC400H120	400	27.67	241042	1
CZKSC500H120	500	31.51	241052	1
CZKSC600H120	600	35.03	241062	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

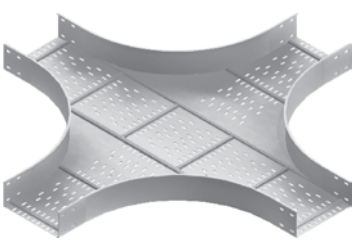

APPLICATIONS
Branching out cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Left Reducer

RKLS...



RKLSC...H120

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKLSC300/200H120	300	200	4.69	241332	1
RKLSC400/300H120	400	300	5.29	241342	1
RKLSC500/400H120	500	400	5.89	241352	1
RKLSC600/500H120	600	500	6.49	241362	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Right Reducer

RKPS...



RKPSC...H120

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKPSC300/200H120	300	200	4.69	241432	1
RKPSC400/300H120	400	300	5.29	241442	1
RKPSC500/400H120	500	400	5.89	241452	1
RKPSC600/500H120	600	500	6.49	241462	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Straight Reducer

RKSS...



RKSSC...H120

± 2.0 mm

CODE	Width mm a	b	kg 1 pc	Catalogue No.	Qty
RKSSC300/200H120	300	200	4.69	241532	1
RKSSC400/300H120	400	300	5.29	241542	1
RKSSC500/400H120	500	400	5.89	241552	1
RKSSC600/500H120	600	500	6.49	241562	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Reducing/extending Width of cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Application example of RKSSC...H120.

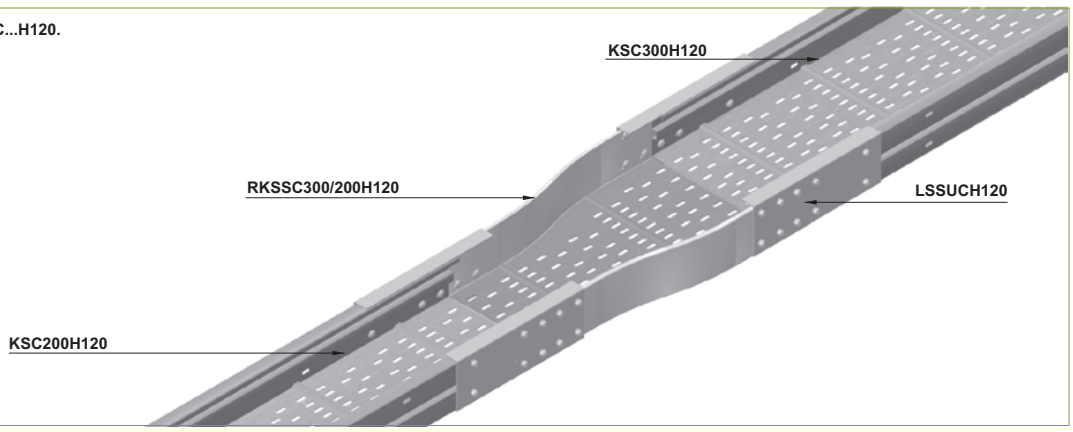

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Vertical Bend - Internal

LWKS...



LWKSC...H120

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSC200H120	200	8.18	241122	1
LWKSC300H120	300	9.41	241132	1
LWKSC400H120	400	10.40	241142	1
LWKSC500H120	500	11.93	241152	1
LWKSC600H120	600	13.32	241162	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.



90° Vertical Bend - External

LZKS...



APPLICATIONS
Diversion in cable routing.

LZKSC...H120

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSC200H120	200	8.18	241222	1
LZKSC300H120	300	9.41	241232	1
LZKSC400H120	400	10.40	241242	1
LZKSC500H120	500	11.93	241252	1
LZKSC600H120	600	13.32	241262	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.

Adjustable Vertical Bend

LLKS...



LLKSC...H120

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKSC200H120	200	10.70	241622	1
LLKSC300H120	300	11.30	241632	1
LLKSC400H120	400	11.81	241642	1
LLKSC500H120	500	12.42	241652	1
LLKSC600H120	600	12.91	241662	1

Adjustable Vertical Bend Element

ELKS...



APPLICATIONS
Diversion in cable routing.
Full range angle adjustment with a lock.

ELKSC...H120

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKSC200H120	200	3.66	241722	1
ELKSC300H120	300	3.94	241732	1
ELKSC400H120	400	4.21	241742	1
ELKSC500H120	500	4.50	241752	1
ELKSC600H120	600	4.77	241762	1

For the installation of segments of adjustable vertical bend element use Screw Sets SMM10x20



MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ≠ [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Cable Tray

KS...

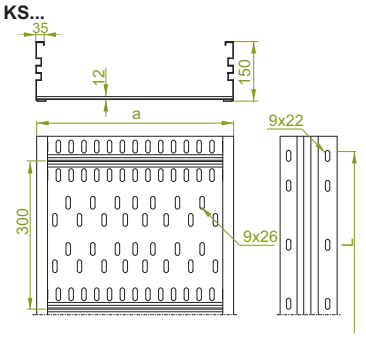

IMPORTANT! Spacing of Supports up to 10 m!

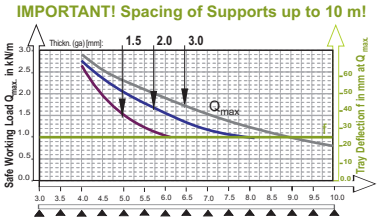



WIDTH	USABLE CROSS-SECTION
200	278 cm²
300	376 cm²
400	507 cm²
500	639 cm²
600	878 cm²

APPLICATIONS
Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 10 m.

KSP...H150

≠ 1.5 mm

CODE	Width a mm	Lenght L mm	1 m kg	Catalogue No.	Qty/m	
KSP200H150/6	200	6000	8.18	270021	1/6	*
KSP300H150/6	300	6000	9.14	270031	1/6	*
KSP400H150/6	400	6000	10.10	270041	1/6	*
KSP500H150/6	500	6000	11.06	270051	1/6	*
KSP600H150/6	600	6000	12.02	270061	1/6	*

* - available on request in qty over 200 m

KSC...H150

≠ 2.0 mm

CODE	Width a mm	Lenght L mm	1 m kg	Catalogue No.	Qty/m
KSC200H150/6	200	6000	10.00	270121	1/6
KSC300H150/6	300	6000	10.90	270131	1/6
KSC400H150/6	400	6000	11.80	270141	1/6
KSC500H150/6	500	6000	12.70	270151	1/6
KSC600H150/6	600	6000	13.60	270161	1/6

KST...H150

≠ 3.0 mm

CODE	Width a mm	Lenght L mm	1 m kg	Catalogue No.	Qty/m	
KST200H150/6	200	6000	13.32	270221	1/6	*
KST300H150/6	300	6000	14.22	270231	1/6	*
KST400H150/6	400	6000	15.12	270241	1/6	*
KST500H150/6	500	6000	16.02	270251	1/6	*
KST600H150/6	600	6000	16.92	270261	1/6	*

* - available on request in qty over 200 m

In case of large orders:
- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1.2 and 2.5mm thick sheet.

Cable Tray adapted for installation of Cable Clamps: UKZ1/UKZO1 and UKZ2.

Strong

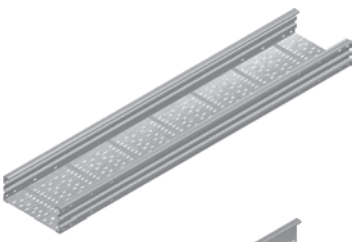

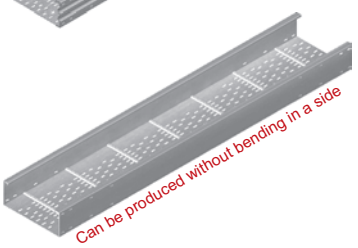

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) **on request:**
- KSP... - over 200 m
- KST... - over 200 m
E- stainless steel (SS), grade 1.4301 (AISI304), sections to 3m long, with rare perforation in the bottom
L- powder coating in a full range of colours (PC) (info p. 4)

Straight Connector

LSU...



APPLICATIONS
Joining long span cable tray

LSUCH150

≠ 2.0 mm

CODE	Height H mm	Lenght L mm	1 pc kg	Catalogue No.	Qty
LSUCH150	155	500	2.17	270302	20

LSUTH150

≠ 3.0 mm

CODE	Height H mm	Lenght L mm	1 pc kg	Catalogue No.	Qty
LSUTH150	157	500	2.65	270303	20

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16

LSUDTH150

≠ 3.0 mm

CODE	Lenght L mm	1 pc kg	Catalogue No.	Qty
LSUDTH150	800	3.85	270702	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. Long Straight Connector should be used in case of support spacing above 6m. For the assembly use 12 Screw Sets SGKM8x16.

N

Straight Connector

LSSU...



APPLICATIONS
Joining fittings for long span systems to cable tray.

LSSUCH150

≠ 2.0 mm

CODE	Height H mm	1 pc kg	Catalogue No.	Qty
LSSUCH150	155	1.04	270402	20

LSSUTH150

≠ 3.0 mm

CODE	Height H mm	1 pc kg	Catalogue No.	Qty
LSSUTH150	157	1.55	270403	20

Universal Straight Connector for Fittings that suits Long Span Cable Trays and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16.

N

Angle Connector

LKSU...



APPLICATIONS
Joining long span cable tray routed at various angles.

LKSUCH150

≠ 2.0 mm

CODE	Height H mm	1 pc kg	Catalogue No.	Qty
LKSUCH150	155	2.98	270502	10

LKSUTH150

≠ 3.0 mm

CODE	Height H mm	1 pc kg	Catalogue No.	Qty
LKSUTH150	157	3.31	270503	10

Universal Angle Connectors - Bendable for Long Span Cable Tray and Ladder Systems. For the assembly use 18 Screw Sets SGKM8x16.



Articulated Connector

LGSU...



APPLICATIONS
Joining cable tray routed at various angles. Full range angle adjustment with a lock.

LGSUCH150

≠ 2.0 mm

CODE	Height H mm	1 pc kg	Catalogue No.	Qty
LGSUCH150	155	2.21	270602	10

LGSUTH150

≠ 3.0 mm

CODE	Height H mm	1 pc kg	Catalogue No.	Qty
LGSUTH150	157	2.65	270603	10

Universal Articulated Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 12 Screw Sets SGKM8x16. Full range angle adjustment!

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ≠ [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Horizontal Bend

KKS...



KKSC...H150

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSC200H150	200	11.14	270722	1
KKSC300H150	300	14.69	270732	1
KKSC400H150	400	16.24	270742	1
KKSC500H150	500	19.09	270752	1
KKSC600H150	600	22.24	270762	1

KKST...H150

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKST200H150	200	14.58	270723	1
KKST300H150	300	17.34	270733	1
KKST400H150	400	20.22	270743	1
KKST500H150	500	23.22	270753	1
KKST600H150	600	26.16	270763	1

45° Horizontal Bend

KKSM...



KKSMC...H150

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMC200H150	200	7.17	270822	1
KKSMC300H150	300	8.54	270832	1
KKSMC400H150	400	10.02	270842	1
KKSMC500H150	500	11.50	270852	1
KKSMC600H150	600	13.20	270862	1

KKSMT...H150

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMT200H150	200	9.16	270823	1
KKSMT300H150	300	10.85	270833	1
KKSMT400H150	400	12.67	270843	1
KKSMT500H150	500	14.54	270853	1
KKSMT600H150	600	16.37	270863	1

APPLICATIONS
Diversion in cable routing.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

Horizontal Tee

TKS...

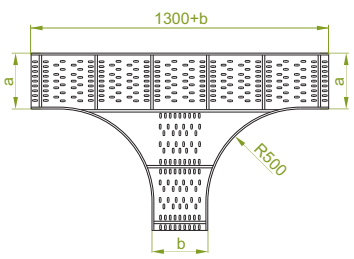

TKSC...H150

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKSC200H150	200	17.28	270922	1
TKSC300H150	300	20.36	270932	1
TKSC400H150	400	23.83	270942	1
TKSC500H150	500	27.01	270952	1
TKSC600H150	600	30.64	270962	1

TKST...H150

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKST200H150	200	25.52	270923	1
TKST300H150	300	29.59	270933	1
TKST400H150	400	33.66	270943	1
TKST500H150	500	37.96	270953	1
TKST600H150	600	41.80	270963	1

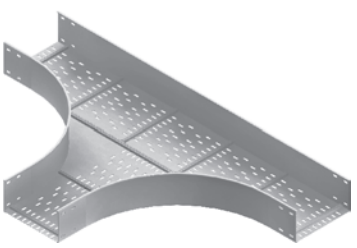

Horizontal Cross-over

CZKS...

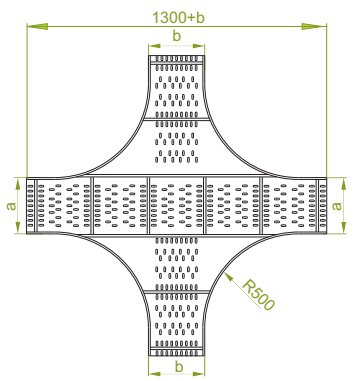

CZKSC...H150

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKSC200H150	200	22.51	271022	1
CZKSC300H150	300	25.99	271032	1
CZKSC400H150	400	29.83	271042	1
CZKSC500H150	500	33.63	271052	1
CZKSC600H150	600	37.19	271062	1

CZKST...H150

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKST200H150	200	27.84	271023	1
CZKST300H150	300	31.26	271033	1
CZKST400H150	400	35.10	271043	1
CZKST500H150	500	39.06	271053	1
CZKST600H150	600	42.66	271063	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

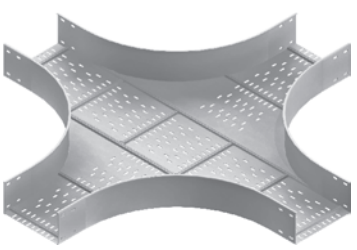

APPLICATIONS
Branching out cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Left Reducer

RKLS...



RKLSC...H150

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKLSC300/200H150	300	200	5.67	271332	1
RKLSC400/300H150	400	300	6.38	271342	1
RKLSC500/400H150	500	400	7.18	271352	1
RKLSC600/500H150	600	500	7.82	271362	1

RKLST...H150

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKLST300/200H150	300	200	7.50	271333	1
RKLST400/300H150	400	300	8.22	271343	1
RKLST500/400H150	500	400	9.06	271353	1
RKLST600/500H150	600	500	9.66	271363	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Right Reducer

RKPS...



RKPSC...H150

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKPSC300/200H150	300	200	5.67	271432	1
RKPSC400/300H150	400	300	6.38	271442	1
RKPSC500/400H150	500	400	7.18	271452	1
RKPSC600/500H150	600	500	7.82	271462	1

RKPST...H150

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKPST300/200H150	300	200	7.50	271433	1
RKPST400/300H150	400	300	8.22	271443	1
RKPST500/400H150	500	400	9.06	271453	1
RKPST600/500H150	600	500	9.66	271463	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Straight Reducer

RKSS...



RKSSC...H150

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKSSC300/200H150	300	200	5.67	271532	1
RKSSC400/300H150	400	300	6.38	271542	1
RKSSC500/400H150	500	400	7.18	271552	1
RKSSC600/500H150	600	500	7.82	271562	1

RKSST...H150

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKSST300/200H150	300	200	7.50	271533	1
RKSST400/300H150	400	300	8.22	271543	1
RKSST500/400H150	500	400	9.06	271553	1
RKSST600/500H150	600	500	9.66	271563	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Reducing/extending Width of cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Application example of RKSSC...H150.

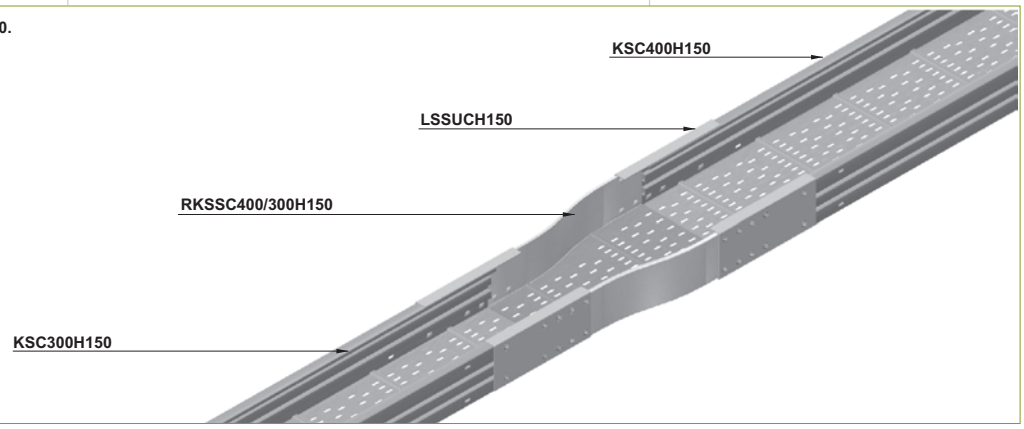

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Vertical Bend - Internal

LWKS...



LWKSC...H150

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSC200H150	200	9.50	271122	1
LWKSC300H150	300	10.73	271132	1
LWKSC400H150	400	11.72	271142	1
LWKSC500H150	500	13.25	271152	1
LWKSC600H150	600	14.64	271162	1

LWKSM...H150

≠ 2.5 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSM200H150	200	12.84	271123	1
LWKSM300H150	300	14.04	271133	1
LWKSM400H150	400	15.00	271143	1
LWKSM500H150	500	16.50	271153	1
LWKSM600H150	600	17.86	271163	1

90° Vertical Bend - External

LZKS...



LZKSC...H150

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSC200H150	200	9.50	271222	1
LZKSC300H150	300	10.73	271232	1
LZKSC400H150	400	11.72	271242	1
LZKSC500H150	500	13.25	271252	1
LZKSC600H150	600	14.64	271262	1

LZKSM...H150

≠ 2.5 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSM200H150	200	12.84	271223	1
LZKSM300H150	300	14.04	271233	1
LZKSM400H150	400	15.00	271243	1
LZKSM500H150	500	16.50	271253	1
LZKSM600H150	600	17.86	271263	1

APPLICATIONS
Diversion in cable routing.

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.

Adjustable Vertical Bend

LLKS...



LLKSC...H150

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKSC200H150	200	14.02	271622	1
LLKSC300H150	300	14.62	271632	1
LLKSC400H150	400	15.13	271642	1
LLKSC500H150	500	15.73	271652	1
LLKSC600H150	600	16.23	271662	1

LLKST...H150

≠ 3.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKST200H150	200	20.52	271623	1
LLKST300H150	300	21.17	271633	1
LLKST400H150	400	21.72	271643	1
LLKST500H150	500	22.37	271653	1
LLKST600H150	600	22.92	271663	1

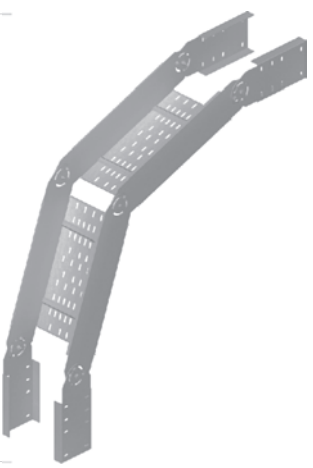

Adjustable Vertical Bend Element

ELKS...



ELKSC...H150

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKSC200H150	200	4.89	271722	1
ELKSC300H150	300	5.17	271732	1
ELKSC400H150	400	5.43	271742	1
ELKSC500H150	500	5.72	271752	1
ELKSC600H150	600	6.00	271762	1

ELKST...H150

≠ 3.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKST200H150	200	7.08	271723	1
ELKST300H150	300	7.38	271733	1
ELKST400H150	400	7.67	271743	1
ELKST500H150	500	7.98	271753	1
ELKST600H150	600	8.28	271763	1

For the installation of segments of adjustable vertical bend element use Screw Sets SMM10x20

APPLICATIONS
Diversion in cable routing.
Full range angle adjustment with a lock.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ≠ [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Cable Tray

KS...

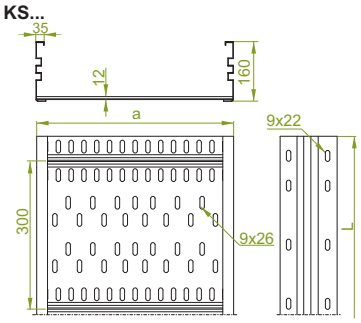

IMPORTANT! Spacing of Supports up to 10 m!

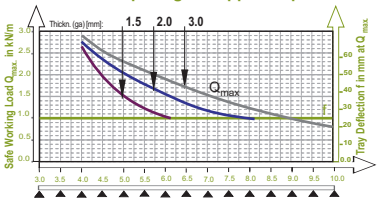



WIDTH	USABLE CROSS-SECTION
200	298 cm²
300	406 cm²
400	547 cm²
500	689 cm²
600	938 cm²

APPLICATIONS
Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 10 m.

KSP...H160

CODE	Width a mm	Lenght L mm	kg 1 m	± 1.5 mm Catalogue No.	Qty/m	
KSP200H160/6	200	6000	8.42	272016	1/6	*
KSP300H160/6	300	6000	9.38	273016	1/6	*
KSP400H160/6	400	6000	10.34	274016	1/6	*
KSP500H160/6	500	6000	11.30	275016	1/6	*
KSP600H160/6	600	6000	12.26	276016	1/6	*

* - available on request in qty over 200 m

KSC...H160

CODE	Width a mm	Lenght L mm	kg 1 m	± 2.0 mm Catalogue No.	Qty/m
KSC200H160/6	200	6000	10.32	272116	1/6
KSC300H160/6	300	6000	11.22	273116	1/6
KSC400H160/6	400	6000	12.12	274116	1/6
KSC500H160/6	500	6000	13.02	275116	1/6
KSC600H160/6	600	6000	13.92	276116	1/6

KST...H160

CODE	Width a mm	Lenght L mm	kg 1 m	± 3.0 mm Catalogue No.	Qty/m	
KST200H160/6	200	6000	13.80	272216	1/6	*
KST300H160/6	300	6000	14.70	273216	1/6	*
KST400H160/6	400	6000	15.60	274216	1/6	*
KST500H160/6	500	6000	16.50	275216	1/6	*
KST600H160/6	600	6000	17.40	276216	1/6	*

* - available on request in qty over 200 m

In case of large orders:
- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1.2 and 2.5mm thick sheet.

Cable Tray adapted for installation of Cable Clamps: UKZ1/UKZO1 and UKZ2.

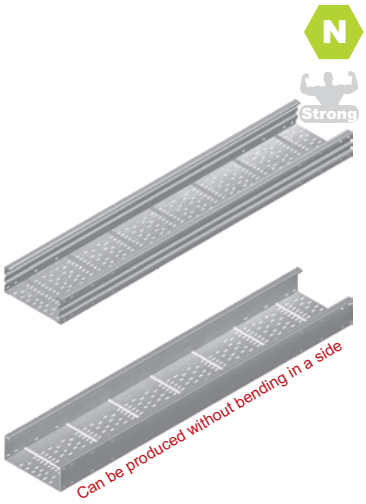

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) **on request:**
- KSP... - over 200 m
- KST... - over 200 m
E- stainless steel (SS), grade 1.4301 (AISI304), sections to 3m long, with rare perforation in the bottom
L- powder coating in a full range of colours (PC) (info p. 4)

Straight Connector

LSU...



APPLICATIONS
Joining long span cable tray

LSUCH160

CODE	Height H mm	Lenght L mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LSUCH160	165	500	2.05	270116	20

LSUTH160

CODE	Height H mm	Lenght L mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LSUTH160	167	500	2.54	270216	20

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16

LSUDTH160

CODE	Height H mm	Lenght L mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LSUDTH160	167	800	4.04	270316	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. Long Straight Connector should be used in case of support spacing above 6m.
For the assembly use 12 Screw Sets SGKM8x16

Straight Connector

LSSU...



APPLICATIONS
Joining fittings for long span systems to cable tray.

LSSUCH160

CODE	Height H mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LSSUCH160	165	0.59	270416	20

LSSUTH160

CODE	Height H mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LSSUTH160	167	0.88	270516	20

Universal Straight Connector for Fittings that suits Long Span Cable Trays and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16

Angle Connector

LKSU...



APPLICATIONS
Joining long span cable tray routed at various angles.

LKSUCH160

CODE	Height H mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LKSUCH160	165	3.11	270616	10

LKSUTH160

CODE	Height H mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LKSUTH160	167	3.50	270716	10

Universal Angle Connectors - Bendable for Long Span Cable Tray and Ladder Systems. For the assembly use 16 Screw Sets SGKM8x16



Articulated Connector

LGSU...



APPLICATIONS
Joining cable tray routed at various angles. Full range angle adjustment with a lock.

LGSUCH160

CODE	Height H mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LGSUCH160	165	2.32	270816	10

LGSUTH160

CODE	Height H mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LGSUTH160	167	2.81	270916	10

Universal Articulated Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 12 Screw Sets SGKM8x16
Full range angle adjustment!

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Horizontal Bend

KKS...



KKSC...H160

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSC200H160	200	11.54	272316	1
KKSC300H160	300	15.11	273316	1
KKSC400H160	400	16.69	274316	1
KKSC500H160	500	19.56	275316	1
KKSC600H160	600	22.74	276316	1

KKST...H160

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKST200H160	200	15.18	272416	1
KKST300H160	300	17.97	273416	1
KKST400H160	400	20.89	274416	1
KKST500H160	500	23.93	275416	1
KKST600H160	600	26.91	276416	1

45° Horizontal Bend

KKSM...



KKSMC...H160

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMC200H160	200	7.42	272516	1
KKSMC300H160	300	8.80	273516	1
KKSMC400H160	400	10.47	274516	1
KKSMC500H160	500	11.78	275516	1
KKSMC600H160	600	13.50	276516	1

KKSMT...H160

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMT200H160	200	9.53	272616	1
KKSMT300H160	300	11.24	273616	1
KKSMT400H160	400	13.08	274616	1
KKSMT500H160	500	14.97	275616	1
KKSMT600H160	600	16.82	276616	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

APPLICATIONS
Diversion in cable routing.

Horizontal Tee

TKS...

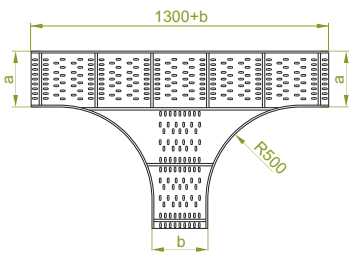

TKSC...H160

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKSC200H160	200	17.87	272716	1
TKSC300H160	300	20.96	273716	1
TKSC400H160	400	24.45	274716	1
TKSC500H160	500	27.75	275716	1
TKSC600H160	600	31.29	276716	1

TKST...H160

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKST200H160	200	26.40	272816	1
TKST300H160	300	30.49	273816	1
TKST400H160	400	34.53	274816	1
TKST500H160	500	38.91	275816	1
TKST600H160	600	42.78	276816	1



Horizontal Cross-over

CZKS...

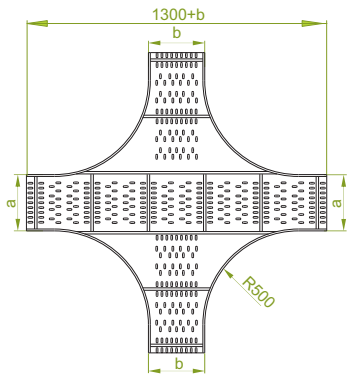

CZKSC...H160

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKSC200H160	200	23.20	272916	1
CZKSC300H160	300	26.68	273916	1
CZKSC400H160	400	30.52	274916	1
CZKSC500H160	500	34.32	275916	1
CZKSC600H160	600	37.88	276916	1

CZKST...H160

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKST200H160	200	28.88	282016	1
CZKST300H160	300	32.30	283016	1
CZKST400H160	400	36.14	284016	1
CZKST500H160	500	40.10	285016	1
CZKST600H160	600	43.70	286016	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Branching out cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Left Reducer

RKLS...



RKLSC...H160

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKLSC300/200H160	300	200	5.88	282116	1
RKLSC400/300H160	400	300	6.59	283116	1
RKLSC500/400H160	500	400	7.39	284116	1
RKLSC600/500H160	600	500	8.03	285116	1

RKLST...H160

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKLST300/200H160	300	200	7.82	286116	1
RKLST400/300H160	400	300	8.54	287116	1
RKLST500/400H160	500	400	9.38	288116	1
RKLST600/500H160	600	500	9.98	289116	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Right Reducer

RKPS...



RKPSC...H160

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKPSC300/200H160	300	200	5.88	282216	1
RKPSC400/300H160	400	300	6.59	283216	1
RKPSC500/400H160	500	400	7.39	284216	1
RKPSC600/500H160	600	500	8.03	285216	1

RKPST...H160

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKPST300/200H160	300	200	7.82	286216	1
RKPST400/300H160	400	300	8.54	287216	1
RKPST500/400H160	500	400	9.38	288216	1
RKPST600/500H160	600	500	9.98	289216	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Straight Reducer

RKSS...



RKSSC...H160

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKSSC300/200H160	300	200	5.89	282316	1
RKSSC400/300H160	400	300	6.60	283316	1
RKSSC500/400H160	500	400	7.40	284316	1
RKSSC600/500H160	600	500	8.04	285316	1

RKSST...H160

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKSST300/200H160	300	200	7.83	286316	1
RKSST400/300H160	400	300	8.04	287316	1
RKSST500/400H160	500	400	8.55	288316	1
RKSST600/500H160	600	500	9.39	289316	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Reducing/extending Width of cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Application example of RKSSC...H160.

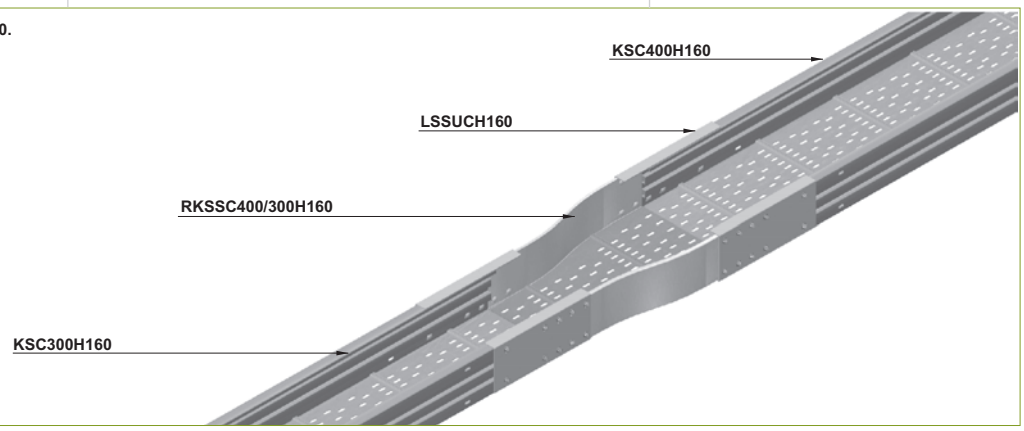

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Vertical Bend - Internal

LWKS...



LWKSC...H160

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSC200H160	200	9.92	282416	1
LWKSC300H160	300	11.15	283416	1
LWKSC400H160	400	12.13	284416	1
LWKSC500H160	500	13.67	285416	1
LWKSC600H160	600	15.06	286416	1

LWKSM...H160

≠ 2.5 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSM200H160	200	13.26	282516	1
LWKSM300H160	300	14.82	283516	1
LWKSM400H160	400	15.42	284516	1
LWKSM500H160	500	16.92	285516	1
LWKSM600H160	600	18.28	286516	1

90° Vertical Bend - External

LZKS...



LZKSC...H160

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSC200H160	200	9.92	282616	1
LZKSC300H160	300	11.15	283616	1
LZKSC400H160	400	12.13	284616	1
LZKSC500H160	500	13.67	285616	1
LZKSC600H160	600	15.06	286616	1

LZKSM...H160

≠ 2.5 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSM200H160	200	13.26	282716	1
LZKSM300H160	300	14.82	283716	1
LZKSM400H160	400	15.42	284716	1
LZKSM500H160	500	16.92	285716	1
LZKSM600H160	600	18.28	286716	1

APPLICATIONS
Diversion in cable routing.

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.

Adjustable Vertical Bend

LLKS...



LLKSC...H160

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKSC200H160	200	14.55	282816	1
LLKSC300H160	300	15.15	283816	1
LLKSC400H160	400	15.66	284816	1
LLKSC500H160	500	16.25	285816	1
LLKSC600H160	600	16.76	286816	1

LLKST...H160

≠ 3.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKST200H160	200	21.32	282916	1
LLKST300H160	300	21.97	283916	1
LLKST400H160	400	22.52	284916	1
LLKST500H160	500	23.17	285916	1
LLKST600H160	600	23.72	286916	1

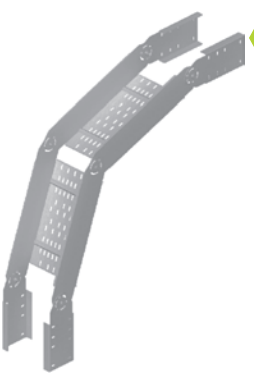

Adjustable Vertical Bend Element

ELKS...



ELKSC...H160

≠ 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKSC200H160	200	5.05	287016	1
ELKSC300H160	300	5.33	288016	1
ELKSC400H160	400	5.59	289016	1
ELKSC500H160	500	5.88	287416	1
ELKSC600H160	600	6.16	288416	1

ELKST...H160

≠ 3.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKST200H160	200	7.32	289416	1
ELKST300H160	300	7.62	287516	1
ELKST400H160	400	7.91	288516	1
ELKST500H160	500	8.22	289516	1
ELKST600H160	600	8.52	289616	1



For the installation of segments of adjustable vertical bend element use Screw Sets SMM10x20

APPLICATIONS
Diversion in cable routing.
Full range angle adjustment with a lock.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ≠ [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Cable Tray

KS...



IMPORTANT! Spacing of Supports up to 12 m!

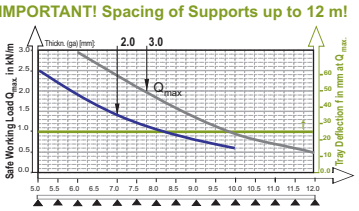

WIDTH	USABLE CROSS-SECTION
200	378 cm²
300	578 cm²
400	778 cm²
500	978 cm²
600	1178 cm²

APPLICATIONS
Cable routing in halls or on-site with limited number of supporting structures. High tray durability allows for applying spacing of supports even every 12m.

KSC...H200

CODE	Width a mm	Lenght L mm	kg 1 m	± 2.0 mm Catalogue No.	Qty/m
KSC200H200/6	200	6000	11.80	290121	1/6
KSC300H200/6	300	6000	12.80	290131	1/6
KSC400H200/6	400	6000	13.80	290141	1/6
KSC500H200/6	500	6000	14.80	290151	1/6
KSC600H200/6	600	6000	15.80	290161	1/6

KST...H200

CODE	Width a mm	Lenght L mm	kg 1 m	± 3.0 mm Catalogue No.	Qty/m
KST200H200/6	200	6000	16.30	290221	1/6
KST300H200/6	300	6000	17.30	290231	1/6
KST400H200/6	400	6000	18.30	290241	1/6
KST500H200/6	500	6000	19.30	290251	1/6
KST600H200/6	600	6000	20.30	290261	1/6

In case of large orders:
- cable tray with perforated side profile
- cable tray from 2 up to 12m long
- cable tray: 1.2 and 2.5mm thick sheet.
Cable Tray adapted for installation of Cable Clamps: UKZ1/UKZO1 and UKZ2.

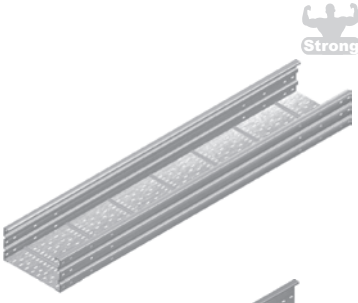

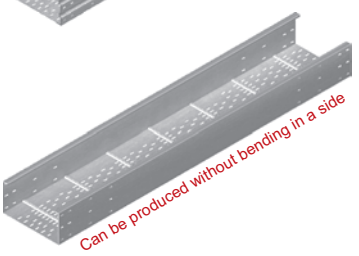

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG) **on request: - KST... - over 200 m**
E- stainless steel (SS), grade 1.4301 (AISI304), sections to 3m long, with rare perforation in the bottom
L- powder coating in a full range of colours (PC) (info p. 4)

Straight Connector

LSU...



APPLICATIONS
Joining long span cable tray

LSUCH200

CODE	Height H mm	Lenght L mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LSUCH200	205	550	1.91	290302	10

LSUTH200

CODE	Height H mm	Lenght L mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LSUTH200	207	550	2.86	290303	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16

LSUDTH200

CODE	Height H mm	Lenght L mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LSUDTH200	207	800	4.16	290702	10

Uniwersal Straight Connector for Long Span Cable Tray and Ladder Systems. Long Straight Connector should be used in case of support spacing above 6m. For the assembly use 18 Screw Sets SGKM8x16

Straight Connector

LSSU...



APPLICATIONS
Joining fittings for long span systems to cable tray.

LSSUCH200

CODE	Height H mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LSSUCH200	205	1.30	290402	10

LSSUTH200

CODE	Height H mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LSSUTH200	207	1.95	290403	10

Universal Straight Connector for Fittings that suits Long Span Cable Trays and Ladder Systems. For the assembly use 8 Screw Sets SGKM8x16.

Angle Connector

LKSU...



APPLICATIONS
Joining long span cable tray routed at various angles.

LKSUCH200

CODE	Height H mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LKSUCH200	205	3.53	290502	10

LKSUTH200

CODE	Height H mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LKSUTH200	207	4.10	290503	10

Universal Angle Connectors - Bendable for Long Span Cable Tray and Ladder Systems. For the assembly use 18 Screw Sets SGKM8x16.



Articulated Connector

LGSU...



APPLICATIONS
Joining cable tray routed at various angles. Full range angle adjustment with a lock.

LGSUCH200

CODE	Height H mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
LGSUCH200	205	2.43	290602	10

LGSUTH200

CODE	Height H mm	kg 1 pc	± 3.0 mm Catalogue No.	Qty
LGSUTH200	207	3.64	290603	10

Universal Articulated Connector for Long Span Cable Tray and Ladder Systems. For the assembly use 18 Screw Sets SGKM8x16 Full range angle adjustment!

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Horizontal Bend

KKS...



KKSC...H200

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSC200H200	200	13.10	290722	1
KKSC300H200	300	15.77	290732	1
KKSC400H200	400	18.44	290742	1
KKSC500H200	500	21.41	290752	1
KKSC600H200	600	24.04	290762	1

KKST...H200

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKST200H200	200	17.52	290723	1
KKST300H200	300	20.46	290733	1
KKST400H200	400	23.52	290743	1
KKST500H200	500	26.70	290753	1
KKST600H200	600	29.94	290763	1

45° Horizontal Bend

KKSM...



KKSMC...H200

± 2.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMC200H200	200	8.16	290822	1
KKSMC300H200	300	9.78	290832	1
KKSMC400H200	400	11.45	290842	1
KKSMC500H200	500	13.29	290852	1
KKSMC600H200	600	14.91	290862	1

KKSMT...H200

± 3.0 mm

CODE	Width a mm	1 pc kg	Catalogue No.	Qty
KKSMT200H200	200	11.10	290823	1
KKSMT300H200	300	12.91	290833	1
KKSMT400H200	400	14.84	290843	1
KKSMT500H200	500	16.84	290853	1
KKSMT600H200	600	18.88	290863	1

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors LSSU... and Screw Sets SGKM8x16.

APPLICATIONS
Diversion in cable routing.

Horizontal Tee

TKS...

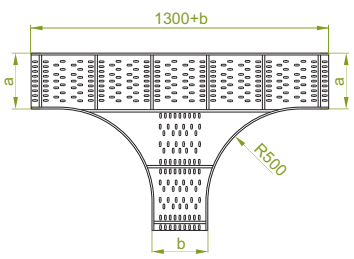

TKSC...H200

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKSC200H200	200	20.28	290922	1
TKSC300H200	300	23.49	290932	1
TKSC400H200	400	26.95	290942	1
TKSC500H200	500	30.30	290952	1
TKSC600H200	600	33.92	290962	1

TKST...H200

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
TKST200H200	200	30.02	290923	1
TKST300H200	300	34.15	290933	1
TKST400H200	400	38.34	290943	1
TKST500H200	500	42.76	290953	1
TKST600H200	600	46.72	290963	1



Horizontal Cross-over

CZKS...

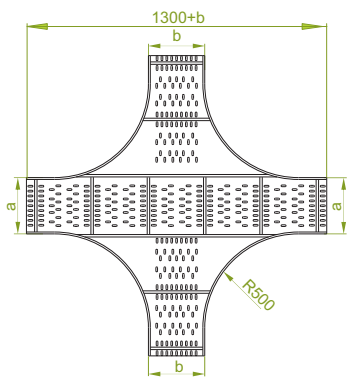

CZKSC...H200

± 2.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKSC200H200	200	24.60	291022	1
CZKSC300H200	300	27.40	291032	1
CZKSC400H200	400	30.40	291042	1
CZKSC500H200	500	34.60	291052	1
CZKSC600H200	600	36.90	291062	1

CZKST...H200

± 3.0 mm

CODE	Width a=b mm	1 pc kg	Catalogue No.	Qty
CZKST200H200	200	32.76	291023	1
CZKST300H200	300	36.54	291033	1
CZKST400H200	400	40.32	291043	1
CZKST500H200	500	44.34	291053	1
CZKST600H200	600	47.88	291063	1

In case of special orders please specify dimensions a and b.

Fittings of any internal radius available upon request. For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



APPLICATIONS
Branching out cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Left Reducer

RKLS...



RKLSC...H200

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKLSC300/200H200	300	200	6.71	291332	1
RKLSC400/300H200	400	300	7.42	291342	1
RKLSC500/400H200	500	400	8.14	291352	1
RKLSC600/500H200	600	500	8.86	291362	1

RKLST...H200

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKLST300/200H200	300	200	9.06	291333	1
RKLST400/300H200	400	300	9.78	291343	1
RKLST500/400H200	500	400	10.50	291353	1
RKLST600/500H200	600	500	11.22	291363	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Right Reducer

RKPS...



RKPSC...H200

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKPSC300/200H200	300	200	6.71	291432	1
RKPSC400/300H200	400	300	7.42	291442	1
RKPSC500/400H200	500	400	8.14	291452	1
RKPSC600/500H200	600	500	8.86	291462	1

RKPST...H200

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKPST300/200H200	300	200	9.06	291433	1
RKPST400/300H200	400	300	9.78	291443	1
RKPST500/400H200	500	400	10.50	291453	1
RKPST600/500H200	600	500	11.22	291463	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LSSU... and Screw Sets SGKM8x16.



Straight Reducer

RKSS...



RKSSC...H200

± 2.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKSSC300/200H200	300	200	6.71	291532	1
RKSSC400/300H200	400	300	7.42	291542	1
RKSSC500/400H200	500	400	8.14	291552	1
RKSSC600/500H200	600	500	8.86	291562	1

RKSST...H200

± 3.0 mm

CODE	Width mm a	b	1 pc kg	Catalogue No.	Qty
RKSST300/200H200	300	200	9.06	291533	1
RKSST400/300H200	400	300	9.78	291543	1
RKSST500/400H200	500	400	10.50	291553	1
RKSST600/500H200	600	500	11.22	291563	1

In case of special orders please specify dimensions a and b.

For joining fittings to cable tray use Straight Connectors for Fittings LDCH100N and Screw Sets SGKM8x16.



APPLICATIONS
Reducing/extending Width of cable runs.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Application example of RKSSC...H200.

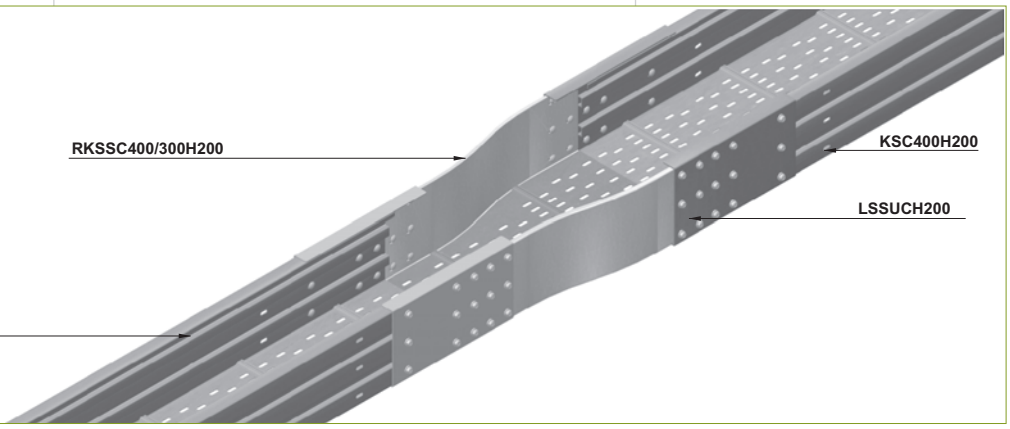

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

90° Vertical Bend - Internal

LWKS...



LWKSC...H200

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSC200H200	200	12.02	291122	1
LWKSC300H200	300	13.33	291132	1
LWKSC400H200	400	14.28	291142	1
LWKSC500H200	500	15.81	291152	1
LWKSC600H200	600	17.02	291162	1

LWKSM...H200

± 2.5 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LWKSM200H200	200	16.08	291123	1
LWKSM300H200	300	17.28	291133	1
LWKSM400H200	400	18.84	291143	1
LWKSM500H200	500	20.34	291153	1
LWKSM600H200	600	21.10	291163	1

90° Vertical Bend - External

LZKS...



LZKSC...H200

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSC200H200	200	12.02	291222	1
LZKSC300H200	300	13.33	291232	1
LZKSC400H200	400	14.28	291242	1
LZKSC500H200	500	15.81	291252	1
LZKSC600H200	600	17.02	291262	1

LZKSM...H200

± 2.5 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LZKSM200H200	200	16.08	291223	1
LZKSM300H200	300	17.28	291233	1
LZKSM400H200	400	18.84	291243	1
LZKSM500H200	500	20.34	291253	1
LZKSM600H200	600	21.10	291263	1

Possibility to create vertical bends of any internal radius adjusted to minimum cable bending angle.
For joining fittings to cable tray use Straight Connectors for Fittings LSSU...and Screw Sets SGKM8x16.



APPLICATIONS
Diversion in cable routing.

Adjustable Vertical Bend

LLKS...

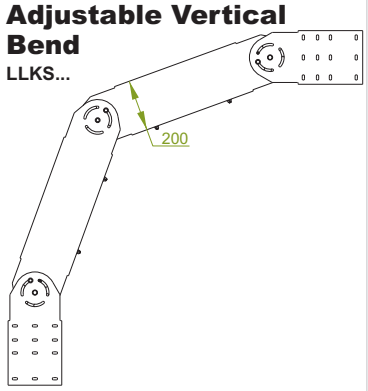

LLKSC...H200

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKSC200H200	200	17.34	281622	1
LLKSC300H200	300	17.94	281632	1
LLKSC400H200	400	18.45	281642	1
LLKSC500H200	500	19.05	281652	1
LLKSC600H200	600	19.55	281662	1

LLKST...H200

± 3.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
LLKST200H200	200	25.50	281623	1
LLKST300H200	300	26.15	281633	1
LLKST400H200	400	26.70	281643	1
LLKST500H200	500	27.35	281653	1
LLKST600H200	600	27.90	281663	1

Adjustable Vertical Bend Element

ELKS...

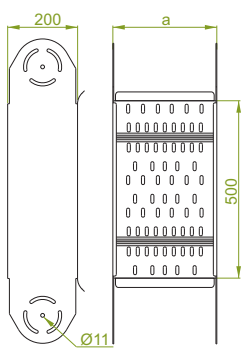

ELKSC...H200

± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKSC200H200	200	5.77	281722	1
ELKSC300H200	300	6.05	281732	1
ELKSC400H200	400	6.31	281742	1
ELKSC500H200	500	6.60	281752	1
ELKSC600H200	600	6.88	281762	1

ELKST...H200

± 3.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
ELKST200H200	200	8.40	281723	1
ELKST300H200	300	8.70	281733	1
ELKST400H200	400	8.99	281743	1
ELKST500H200	500	9.30	281753	1
ELKST600H200	600	9.60	281763	1

For the installation of segments of adjustable vertical bend element use Screw Sets SMM10x20



APPLICATIONS
Diversion in cable routing.
Full range angle adjustment with a lock.

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 1.2 | 1.5 | 2.0 | 2.5 | 3.0

Note. Hot dip galvanizing (PN-EN ISO 1461:2011 (HDG)) and diffusion galvanizing method (PN-EN ISO 17668:2016) for elements up to 200mm will be replaced with zink flake coating method PN-EN ISO 10683:2014-09

Barrier Strip Connector - Top

LPG



LPG

± 1.0 mm

CODE	kg 1 pc	Catalogue No.	Qty
LPG	0.01	**191000**	100

Barrier Strip Connector - Bottom

LPD



APPLICATIONS
Alignment of the top and bottom edges of connected barrier strips (protection of the cables aginast damage during pulling) and fixing to the tray.

LPD

± 1.0 mm

CODE	kg 1 pc	Catalogue No.	Qty
LPD	0.01	**192000**	100



MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel galvanized using zinc flake coating method PN-EN ISO 10683:2014-09
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Barrier Strip

PGJ...

New type **Old type**

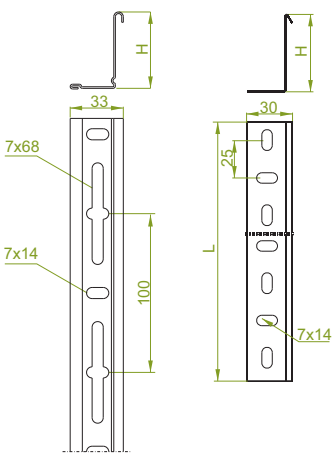

IMPORTANT!
Barrier Strip made from stainless steel available in the old type only.

APPLICATIONS
Lengthwise division of cable trays.

PGJ...

± 1.0 mm

CODE	Height H mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
PGJ80/3N	77	3000	0.90	**180409**	10/30
PGJ100/3N	97	3000	1.07	**110409**	10/30
PGJ120/3	117	3000	1.25	**490208**	10/30
PGJ200/3	167	3000	1.68	**430200**	10/30

IMPORTANT!
Selecting barrier strips for long span cable trays:
H100, H110 - PGJ80/3N
H120 - PGJ100/3N
H150, H160 - PGJ120/3
H200 - PGJ200/3

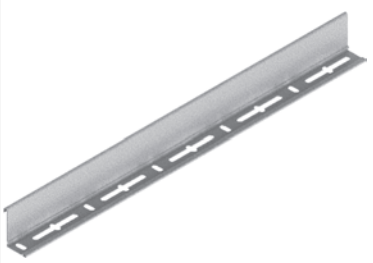

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv.method to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Application Example of Barrier Strip PGJ N with LPG and LPD

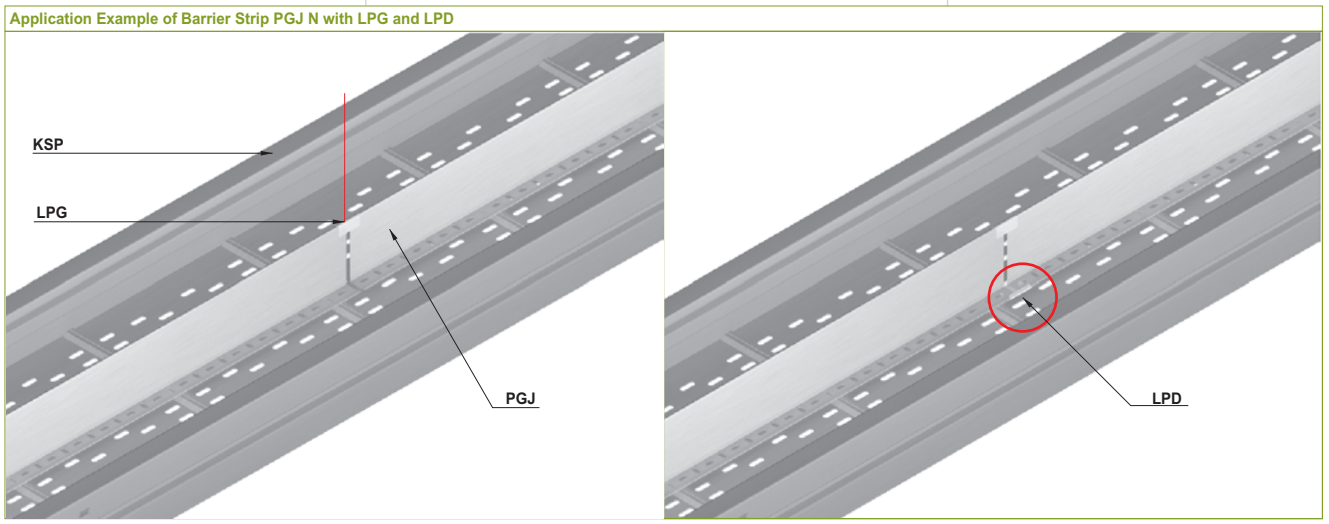

Thickn. (ga) ± [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0

Corner Connector

LKUT



APPLICATIONS
Fast and easy connecting of a new cable run to any area of the existing one.

Vertical Connector

LPS120 LPS200

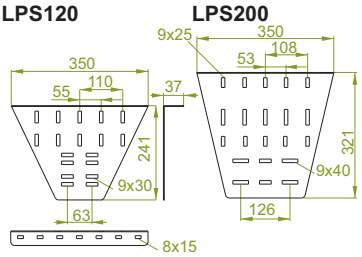

APPLICATIONS
Connection of a vertical descent at any point of a horizontal cable route.

LKUT

± 3.0 mm

CODE	Height H_1 mm	Height H_2 mm	Height H_3 mm	Height H_4 mm	kg 1 pc.	Catalogue No.	Qty
LKUT	122	155	202	246	1.37	**205005**	10

Quick and firm installation to any area of cable tray: no hole drilling necessary!
Important! Corner connector suits any long span system H120, H150, and H200.

LPS...

± 2.0 mm

CODE	kg 1 pc.	Catalogue No.	Qty
LPS120	1.00	**205004**	2
LPS200	1.48	**205006**	2

NOTE!
LPS120 is designed for to the Cable Trays and Ladders side Heights: 100-120mm.
LPS200 is designed for to the Cable Trays and Ladders side Heights: 150-200mm.

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Installation Example of Corner Connector LKUT to a Straight Tray of H120 System

1. Attaching a new cable tray length in any area of the existing cable route.

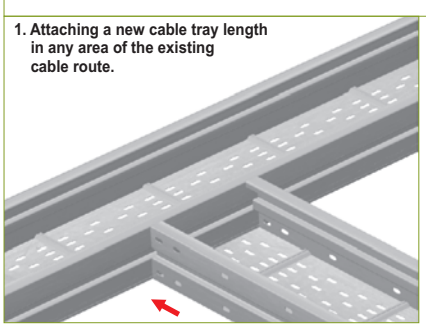

2. Attaching the connector from the top.

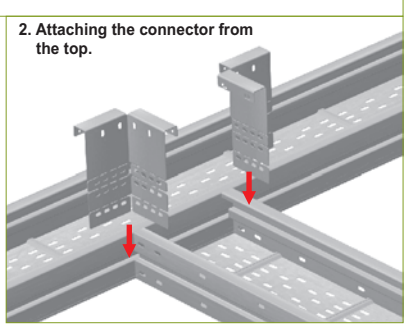

3. Pulling the connector's lock down.

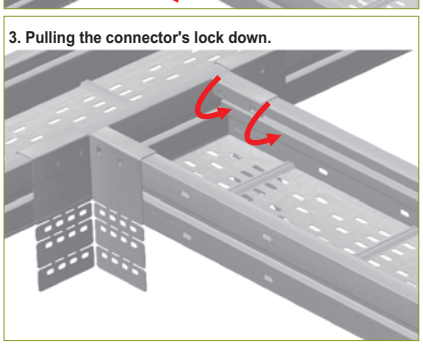

4. Strengthening the connector's lock by screwing it up.

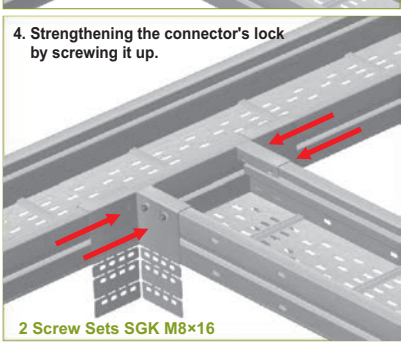

2 Screw Sets SGK M8×16

5. Fitting the connector in by bending the lower part toward the inside

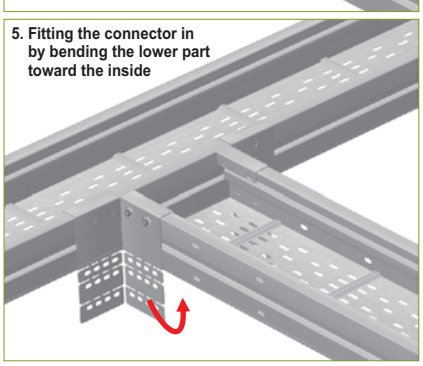

6. The correctly installed connectors.

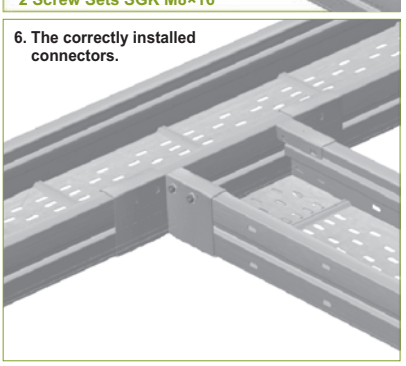

Example of a descent of a cable route using the LPS120 vertical connector

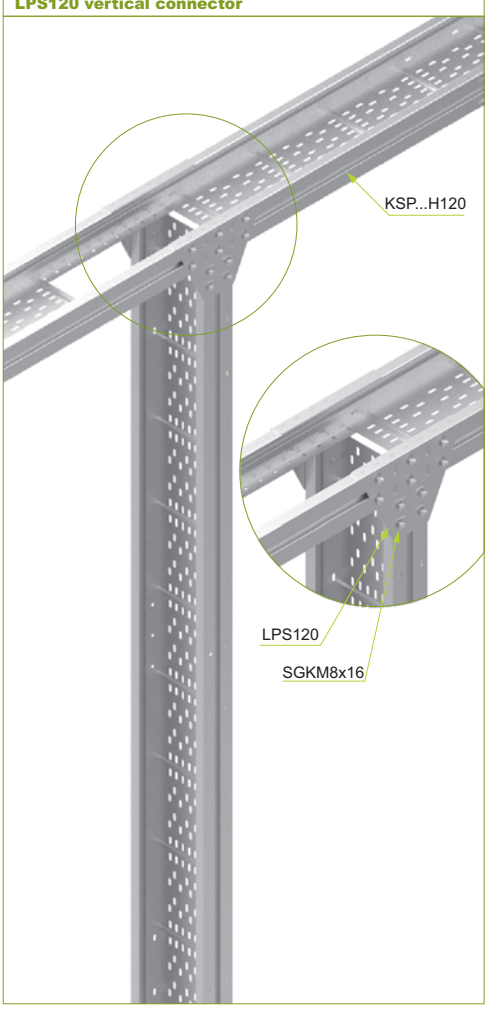

Thickn. (ga) ± [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0

Note. Hot dip galvanizing (PN-EN ISO 1461:2011 (HDG)) and diffusion galvanizing method (PN-EN ISO 17668:2016) for elements up to 200mm will be replaced with zink flake coating method PN-EN ISO 10683:2014-09

Add-on Connector

LDSUC



APPLICATIONS
Branching out from any area of already existing cable runs. Protection against cable slipping from the run while pulling and using.

LDSUC...

≠ 2.0 mm

CODE	kg 1 pc.	Catalogue No.	Qty
LDSUC1	1.19	205001	2
LDSUC2	1.26	205002	2
LDSUC3	1.87	205003	2

Quick and firm installation to any area of cable tray: no hole drilling necessary!

IMPORTANT!
The Add-on Connector should be adjusted to the tray side Heights:
- LKSUC1 will suit long span cable trays and ladders H100
- LKSUC2 will suit long span cable trays and ladders H110
- LKSUC3 will suit long span cable trays and ladders H120, H150, H200

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Cable Clamp

UKZ1/UKZO1

UKZ2



APPLICATIONS
Fixing cables to cable trays

UKZ1/UKZO1...

1 cable

CODE	Dimension D mm	Height H mm	kg 1 pc	Catalogue No.	Qty
UKZ1/UKZO1/16-22	16-22	62	0.04	400900	150
UKZ1/UKZO1/22-28	22-28	68	0.06	401000	150
UKZ1/UKZO1/28-34	28-34	76	0.07	401100	100
UKZ1/UKZO1/34-40	34-40	85	0.08	401200	100
UKZ1/UKZO1/40-46	40-46	92	0.09	401300	100
UKZ1/UKZO1/46-52	46-52	102	0.10	401400	100
UKZ1/UKZO1/52-58	52-58	107	0.11	401601	100
UKZ1/UKZO1/58-64	58-64	111	0.12	401500	100

IMPORTANT!
Old type of UKZ1/UKZO1 Cable Clamp will be available while stocks last

UKZ2...

2 cables

CODE	Dimension D mm	Height H mm	kg 1 pc	Catalogue No.	Qty
UKZ2/16-22	16-22	84	0.06	401600	100
UKZ2/22-28	22-28	97	0.09	401700	100
UKZ2/28-34	28-34	110	0.10	401800	100
UKZ2/34-40	34-40	125	0.12	401900	100
UKZ2/40-46	40-46	137	0.13	402000	50
UKZ2/46-52	46-52	154	0.15	402100	50
UKZ2/52-58	52-58	165	0.16	402301	50
UKZ2/58-64	58-64	175	0.17	402200	50



MATERIAL
Steel galvanized using zinc flake coating method PN-EN ISO 10683:2014-09
Available finishes:
E- stainless steel (SS), grade 1.4301 (AISI304)

Applying Add-on Connectors LDSUC in Combination With Corner Connector LKUT in Long Span System H120.

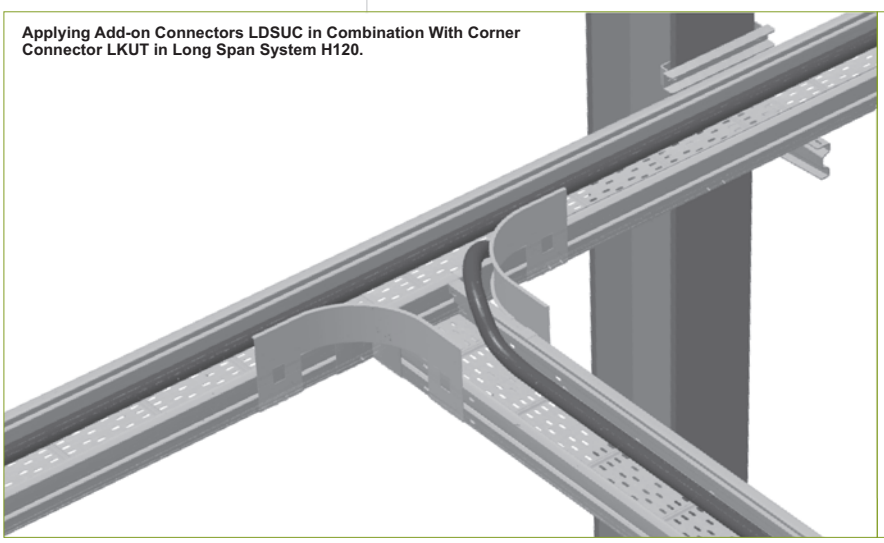

Application Example of Cable to Cable Clamp UKZ1/UKZO1

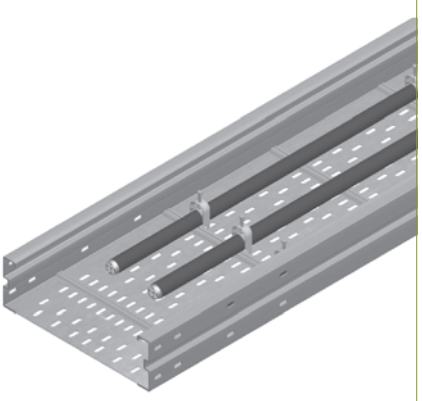

E-90 - Detailed information - see chapter XIX

Thickn. (ga) ≠ [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0

Note. Hot dip galvanizing (PN-EN ISO 1461:2011 (HDG)) and diffusion galvanizing method (PN-EN ISO 17668:2016) for elements up to 200mm will be replaced with zink flake coating method PN-EN ISO 10683:2014-09

Universal Holder

UDU1



APPLICATIONS
Mounting of long span cable trays and ladders H100, H110, H120 to the I-beam

UDU2



APPLICATIONS
Mounting of long span cable trays and ladders H150, H160, H200 to the I-beam

UDU1

CODE	kg 1 pc	Catalogue No.	Qty
UDU1	0.23	**751626**	10

Advantages:
-quick and easy montage of a long span cable tray or ladder to steel construction
-upper rotary part allows for symmetrical mounting of the cable clips (in one line)

UDU2

CODE	kg 1 pc	Catalogue No.	Qty
UDU2	0.25	**751627**	10

Advantages:
-quick and easy montage of a long span cable tray or ladder to steel construction
-upper rotary part allows for symmetrical mounting of the cable clips (in one line)

MATERIAL
Steel galvanized using zinc flake coating method PN-EN ISO 10683:2014-09

Application example of UDU

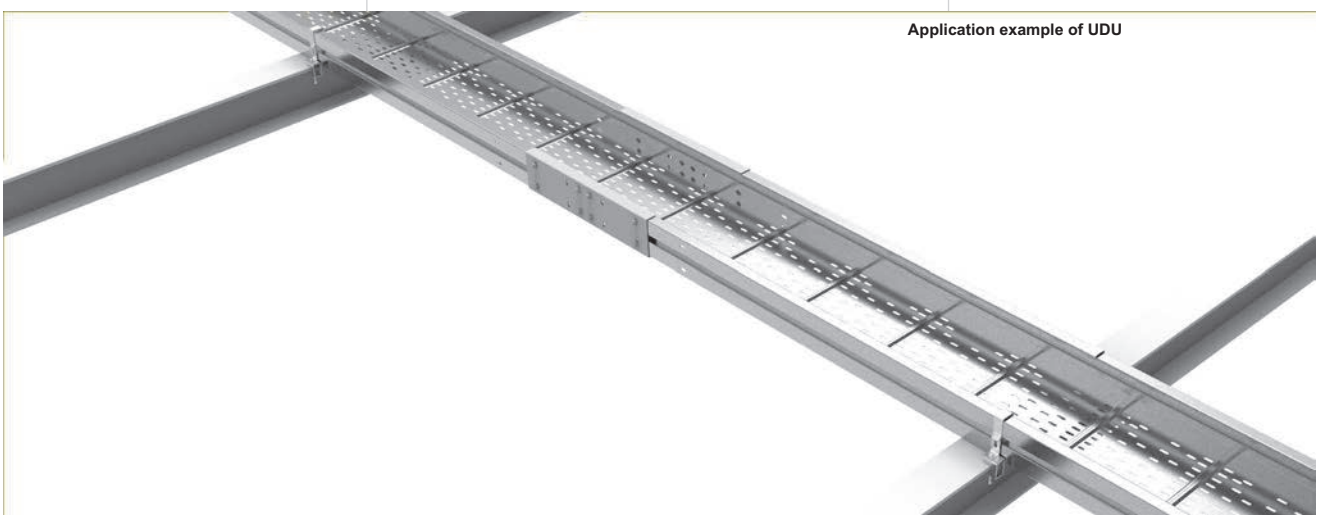

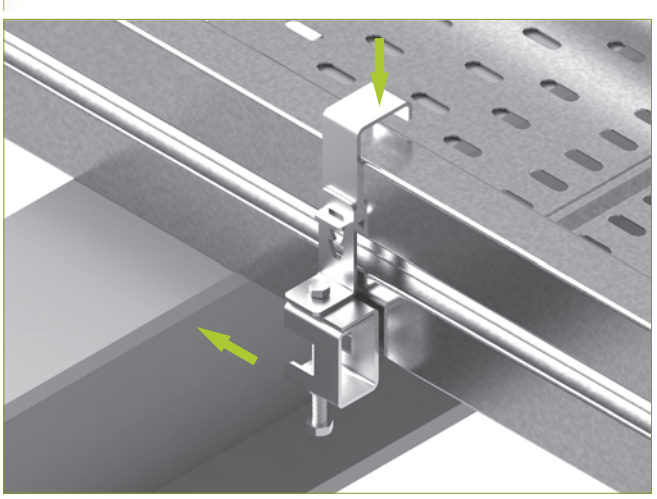

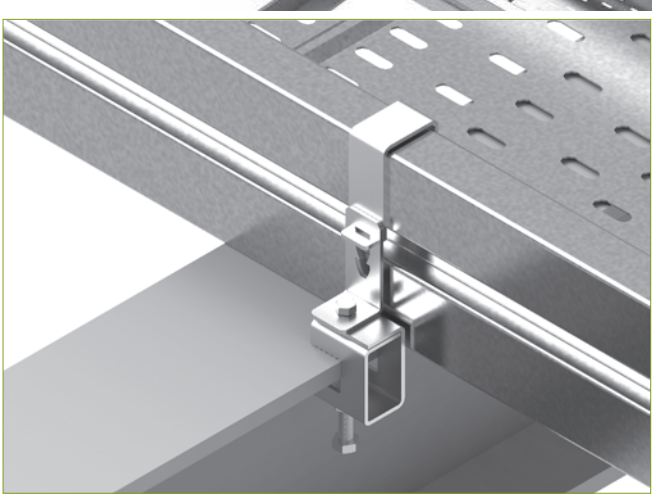

Thickn. (ga) ± [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0

Note. Hot dip galvanizing (PN-EN ISO 1461:2011 (HDG)) and diffusion galvanizing method (PN-EN ISO 17668:2016) for elements up to 200mm will be replaced with zink flake coating method PN-EN ISO 10683:2014-09

Cover Clamp

ZAP2



CODE	≠ 1.5 mm kg 1 pc	Catalogue No.	Qty
ZAP2	0.04	**140900**	100
ZAP2F	0.04	**150900**	100
ZAP2E	0.04	**160900**	100

ZAP3 N



CODE	≠ 2.0 mm kg 1 pc	Catalogue No.	Qty
ZAP3N	0.06	**491303**	100
ZAP3FN	0.06	**491304**	100
ZAP3EN	0.06	**491305**	100

When applying Cover Clamp ZAP2 for H100 and H110 Systems, first bend the clip, then, after pulling it over the bolts' heads - straighten it.

APPLICATIONS
Preventing the cover from slipping:
ZAP2 Long Span Cable Trays and Ladders H100 and H110
Preventing the cover from slipping:
ZAP3 N Long Span Cable Trays and Ladders H120, H150, H160, H200,

MATERIAL
ZAP Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG),
ZAP F steel galvanized using zinc flake coating method PN-EN ISO 10683:2014-09
ZAP E stainless steel (SS), grade 1.4301 (AISI304).
Available finishes:
L- powder coating in a full range of colours (PC) (info p. 4)

Example of Assembly of Cover Clamp ZAP2 in Combination with Long Span Cable Tray H100

ZAP2

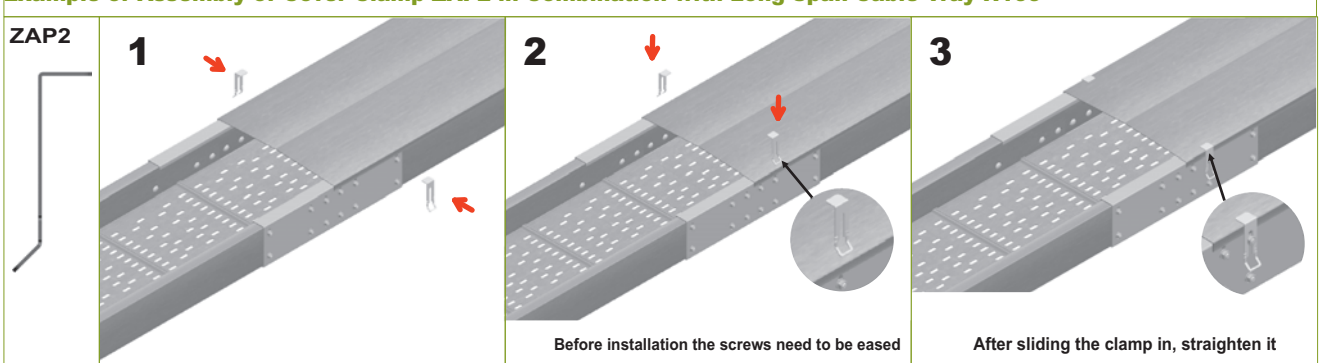

Before installation the screws need to be eased

After sliding the clamp in, straighten it

Example of Assembly of Cover Clamp ZAP3 N in Combination with Long Span Cable Tray H120

ZAP3 N

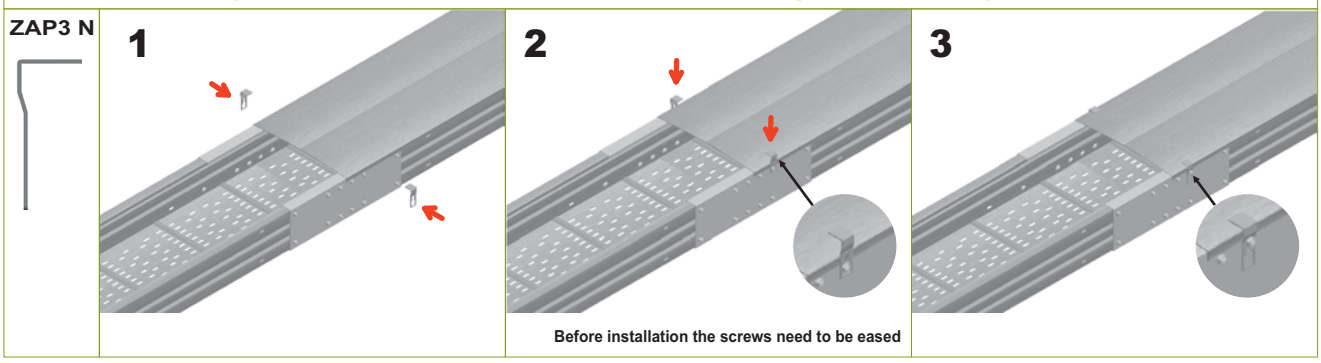

Before installation the screws need to be eased

Thickn. (ga) ≠ [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0

Note. Hot dip galvanizing (PN-EN ISO 1461:2011 (HDG)) and diffusion galvanizing method (PN-EN ISO 17668:2016) for elements up to 200mm will be replaced with zink flake coating method PN-EN ISO 10683:2014-09

Cover

PDD...



PDDP...

± 1.5 mm

CODE	Width a mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
PDDP100/3	100	3000	1.55	402510	6/18
PDDP200/3	200	3000	2.71	402520	6/18
PDDP300/3	300	3000	3.95	402530	6/18
PDDP400/3	400	3000	5.19	402540	4/12
PDDP500/3	500	3000	6.42	402550	4/12
PDDP600/3	600	3000	7.66	402560	4/12

PDDC...

± 2.0 mm

CODE	Width a mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
PDDC100/3	100	3000	1.91	402710	6/18
PDDC200/3	200	3000	3.62	402720	6/18
PDDC300/3	300	3000	5.27	402730	6/18
PDDC400/3	400	3000	6.92	402740	4/12
PDDC500/3	500	3000	8.56	402750	4/12
PDDC600/3	600	3000	10.21	402760	4/12

BENEFITS:
- thanks to specially-shaped profile additional regulation in width is obtained, particularly useful when hot-dip galvanised

Cover with lock

PZDD...

IMPORTANT!
FOR WIDTH 100 mm
– 1 LOCK - SYMMETRICALLY
COVER 2000 mm LONG
CONTAINS 2 LOCKS
COVER 3000 mm LONG
CONTAINS 3 LOCKS

PZDDP...

± 1.5 mm

CODE	Width a mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
PZDDP100/3	100	3000	1.55	402110	6/18

PZDDC...

± 2.0 mm

CODE	Width a	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
PZDDC100/3	100	3000	1.91	402310	6/18

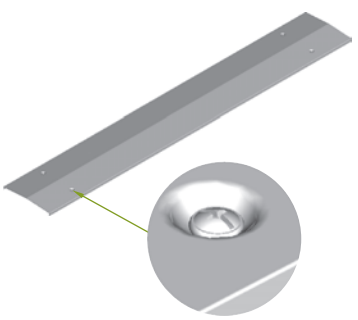

PZDDS...

IMPORTANT!
FOR WIDTH 200-600 mm
– 2 LOCKS In ROW
COVER 2000 mm LONG
CONTAINS 4 LOCKS
COVER 3000 mm LONG
CONTAINS 6 LOCKS

PZDDSP...

± 1.5 mm

CODE	Width a mm	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
PZDDSP200/3	200	3000	2.71	402122	6/18
PZDDSP300/3	300	3000	3.95	402132	6/18
PZDDSP400/3	400	3000	5.19	402142	4/12
PZDDSP500/3	500	3000	6.42	402152	4/12
PZDDSP600/3	600	3000	7.66	402162	4/12

PZDDSC...

± 2.0 mm

CODE	Width a	Lenght L mm	kg 1 m	Catalogue No.	Qty/m
PZDDSC200/3	200	3000	3.62	402322	6/18
PZDDSC300/3	300	3000	5.27	402332	6/18
PZDDSC400/3	400	3000	6.92	402342	4/12
PZDDSC500/3	500	3000	8.56	402352	4/12
PZDDSC600/3	600	3000	10.21	402362	4/12

BENEFITS:
- thanks to specially-shaped profile additional regulation in width is obtained, particularly useful when hot-dip galvanised

APPLICATIONS
To protect cables against damage. Tight cover protection against accumulation of dirt and dust. Applied particularly in heavy dust indoor conditions.

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv.method to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Cover Lock

ZAMU

CODE	kg 1 pc.	Catalogue No.	Qty
ZAMU	0.04	400133	10

IMPORTANT!
Locks fits only to the covers with special punched holes for locks assembly are offered complete with a screw sets

APPLICATIONS
Preventing the cover from slipping.
For DIY install within the cover.

MATERIAL
Steel galvanized using zinc flake coating method PN-EN ISO 10683:2014-09

Thickn. (ga) ± [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0

Cover For 90° Horizontal Bend

PKKSC

PKKSC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PKKSC100	100	1.90	200510	2
PKKSC200	200	3.41	200520	2
PKKSC300	300	5.39	200530	2
PKKSC400	400	7.60	200540	2
PKKSC500	500	10.06	200550	2
PKKSC600	600	12.77	200560	2

Cover For 90° Horizontal Bend with lock

PZKKSC

PZKKSC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PZKKSC100	100	1.90	200610	2
PZKKSC200	200	3.41	200620	2
PZKKSC300	300	5.39	200630	2
PZKKSC400	400	7.60	200640	2
PZKKSC500	500	10.06	200650	2
PZKKSC600	600	12.77	200660	2

Cover For 45° Horizontal Bend

PKKSMC



PKKSMC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PKKSMC100	100	1.32	200710	2
PKKSMC200	200	2.23	200720	2
PKKSMC300	300	3.46	200730	2
PKKSMC400	400	4.81	200740	2
PKKSMC500	500	6.29	200750	2
PKKSMC600	600	7.89	200760	2

Cover For 45° Horizontal Bend with lock

PZKKSMC

PZKKSMC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PZKKSMC100	100	1.32	200810	2
PZKKSMC200	200	2.23	200820	2
PZKKSMC300	300	3.46	200830	2
PZKKSMC400	400	4.81	200840	2
PZKKSMC500	500	6.29	200850	2
PZKKSMC600	600	7.89	200860	2

Cover For Horizontal Tee

PTKSC

PTKSC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PTKSC100	100	3.51	200910	2
PTKSC200	200	6.63	200920	2
PTKSC300	300	9.81	200930	2
PTKSC400	400	13.31	200940	2
PTKSC500	500	17.12	200950	2
PTKSC600	600	21.25	200960	2

Cover For Horizontal Tee with lock

PZTKSC

PZTKSC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PZTKSC100	100	3.51	201010	2
PZTKSC200	200	6.63	201020	2
PZTKSC300	300	9.81	201030	2
PZTKSC400	400	13.31	201040	2
PZTKSC500	500	17.12	201050	2
PZTKSC600	600	21.25	201060	2

Cover for Horizontal Cross-over

PCZKSC

PCZKSC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PCZKSC100	100	7.79	201110	2
PCZKSC200	200	9.15	201120	2
PCZKSC300	300	13.11	201130	2
PCZKSC400	400	17.39	201140	2
PCZKSC500	500	21.98	201150	2
PCZKSC600	600	26.89	201160	2



Cover for Horizontal Cross-over with lock

PZCZKSC

PZCZKSC... ± 2.0 mm

CODE	Width a mm	kg 1 pc	Catalogue No.	Qty
PZCZKSC200	100	4.79	201210	2
PZCZKSC200	200	9.15	201220	2
PZCZKSC300	300	13.11	201230	2
PZCZKSC400	400	17.39	201240	2
PZCZKSC500	500	21.98	201250	2
PZCZKSC600	600	26.89	201260	2

APPLICATIONS
To protect cables against damage. Tight cover protection against accumulation of dirt and dust. Applied particularly in heavy dust indoor conditions.

IMPORTANT!
When ordering cover alone please include the corresponding Product Code or Catalogue Number of the fitting

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ± [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0

Cover for 90° Vertical Bend - Internal

PLKSWC



PLKSWC... CODE	Width a mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PLKSWC100	100	1.70	202810	2
PLKSWC200	200	3.00	202820	2
PLKSWC300	300	4.35	202830	2
PLKSWC400	400	5.71	202840	2
PLKSWC500	500	7.07	202850	2
PLKSWC600	600	8.43	202860	2

Cover with lock for 90° Vertical Bend - Internal

PZLKSWC

PZLKSWC... CODE	Width a mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PZLKSWC100	100	1.70	203010	2
PZLKSWC200	200	3.00	203020	2
PZLKSWC300	300	4.35	203030	2
PZLKSWC400	400	5.71	203040	2
PZLKSWC500	500	7.07	203050	2
PZLKSWC600	600	8.43	203060	2

Cover for 90° Vertical Bend - External

PLKSZC

PLKSZC... CODE	Width a mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PLKSZC100	100	1.96	202910	2
PLKSZC200	200	3.52	202920	2
PLKSZC300	300	5.12	202930	2
PLKSZC400	400	6.72	202940	2
PLKSZC500	500	8.32	202950	2
PLKSZC600	600	9.92	202960	2

Cover for 90° Vertical Bend - External with lock

PZLKSZC

PZLKSZC... CODE	Width a mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PZLKSZC100	100	1.96	203110	2
PZLKSZC200	200	3.52	203120	2
PZLKSZC300	300	5.12	203130	2
PZLKSZC400	400	6.72	203140	2
PZLKSZC500	500	8.32	203150	2
PZLKSZC600	600	9.92	203160	2

Cover for Left Reducer

PRLKSC

PRLKSC... CODE	Width a mm	Width b mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PRLKSC200/100	200	100	1.62	203310	2
PRLKSC300/200	300	200	2.80	203320	2
PRLKSC400/300	400	300	3.85	203330	2
PRLKSC500/400	500	400	4.88	203340	2
PRLKSC600/500	600	500	5.90	203350	2



Cover for Left Reducer with lock

PZRLKSC



PZRLKSC... CODE	Width a mm	Width b mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PZRLKSC200/100	200	100	1.62	203610	2
PZRLKSC300/200	300	200	2.80	203620	2
PZRLKSC400/300	400	300	3.85	203630	2
PZRLKSC500/400	500	400	4.88	203640	2
PZRLKSC600/500	600	500	5.90	203650	2



Cover for Right Reducer

PRPKSC

PRPKSC... CODE	Width a mm	Width b mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PRPKSC200/100	200	100	1.62	203410	2
PRPKSC300/200	300	200	2.80	203420	2
PRPKSC400/300	400	300	3.85	203430	2
PRPKSC500/400	500	400	4.88	203440	2
PRPKSC600/500	600	500	5.90	203450	2



Cover for Right Reducer with lock

PZRPKSC

PZRPKSC... CODE	Width a mm	Width b mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PZRPKSC200/100	200	100	1.62	203710	2
PZRPKSC300/200	300	200	2.80	203720	2
PZRPKSC400/300	400	300	3.85	203730	2
PZRPKSC500/400	500	400	4.88	203740	2
PZRPKSC600/500	600	500	5.90	203750	2



Cover for Straight Reducer

PRSKSC

PRSKSC... CODE	Width a mm	Width b mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PRSKSC200/100	200	100	1.62	203210	2
PRSKSC300/200	300	200	2.80	203220	2
PRSKSC400/300	400	300	3.85	203230	2
PRSKSC500/400	500	400	4.88	203240	2
PRSKSC600/500	600	500	5.90	203250	2



Cover for Straight Reducer with Lock

PZRSKSC



PZRSKSC... CODE	Width a mm	Width b mm	kg 1 pc	± 2.0 mm Catalogue No.	Qty
PZRSKSC200/100	200	100	1.62	203510	2
PZRSKSC300/200	300	200	2.80	203520	2
PZRSKSC400/300	400	300	3.85	203530	2
PZRSKSC500/400	500	400	4.88	203540	2
PZRSKSC600/500	600	500	5.90	203550	2



APPLICATIONS
To protect cables against damage. Tight cover protection against accumulation of dirt and dust. Applied particularly in heavy dust indoor conditions.

IMPORTANT!
When ordering cover alone please include the corresponding Product Code or Catalogue Number of the fitting

MATERIAL
Steel, hot-dip galv. the Sendzimir method to PN-EN 10346:2015-09 (SG)
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS), grade 1.4301 (AISI304)
L- powder coating in a full range of colours (PC) (info p. 4)

Thickn. (ga) ≠ [mm]: 0.7 | 1.0 | 1.2 | 1.5 | 2.0